

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CAB108DC-03W-1

Former P/N: SBH-131A / CAB108SH-03W-1X

Rev. 0-2021
RoHS3 & REACH
Battery Assembly



Physical Characteristics


MATERIALS

Housing	Plastic, ABS Resin, Black
Spring	65C Spring Wire, Steel Nickel Plated
Rivet	Brass, Nickel Plated
Wire	UL 1007, 24 AWG

TEMPERATURE RANGES

Operating	-20 to +65 °C
Storage	-30 to +85 °C

Cell Type D Cell, or equivalent

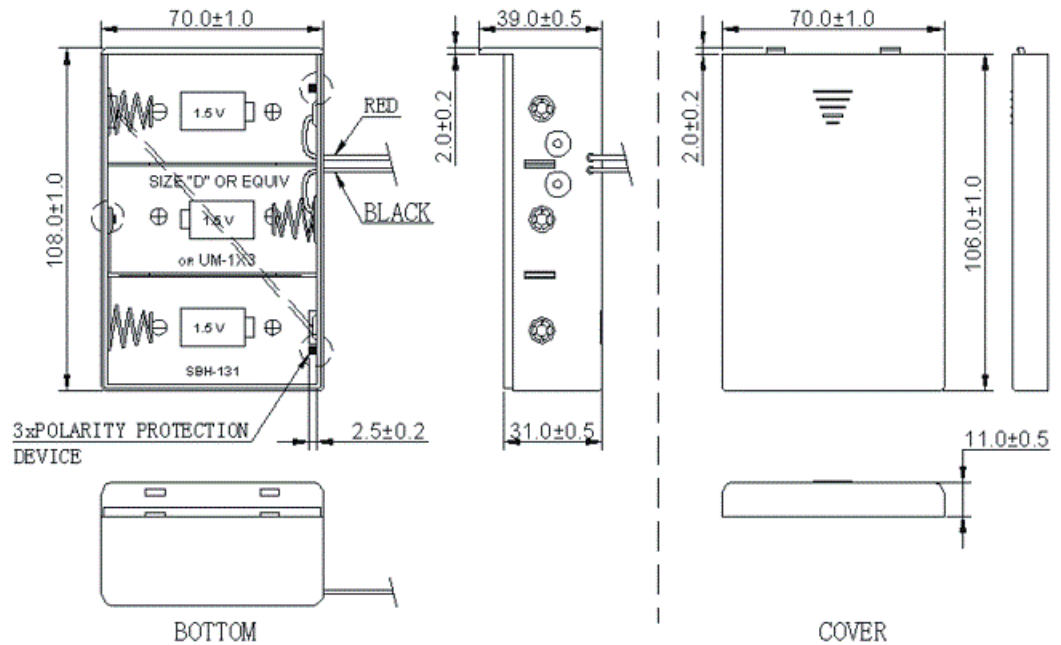

All Measurements are mm unless noted otherwise.

Revision	Description	By	Date
0-2021	Initial Specification Sheet	JL	2021-11-15

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.
©2021 Challenge Electronics, Inc. Pub. 20211116162511