

CAC32-02W90-16-1X

Rev. 1-2024
RoHS3 & REACH
IPX8 Front Face
Chamber Assembly




Operating Characteristics

ELECTRICAL

Rated Power	2 W
Short Term Max Power	3 W
Impedance	4 Ω ± 15 % 2000 Hz; 2 W

ACOUSTIC


f_0	900 Hz ± 20 % 2 W
Freq. Range	720 to 20000 Hz
Rated SPL	104 ± 3 dB
Test Conditions	800, 1000, 1500, 2000 Hz; 2 W; 10 cm
Distortion	<15 % 2000 Hz; 2 W

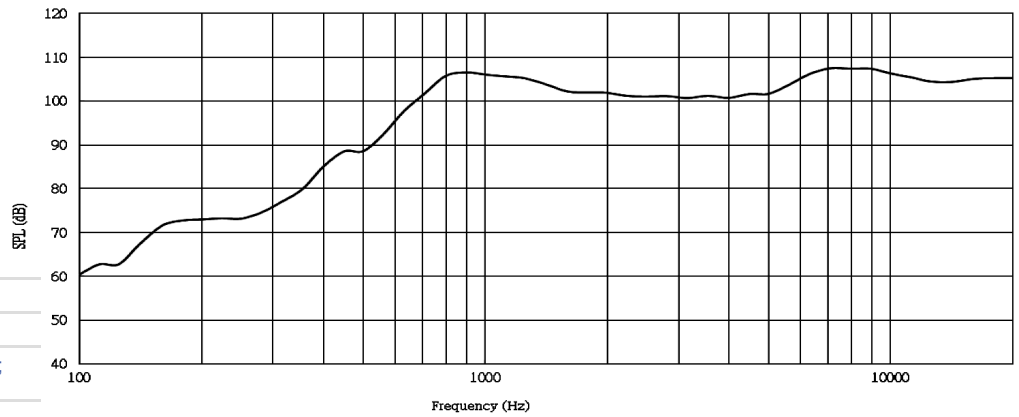

Physical Characteristics

MATERIALS

Speaker Box Frame	PC540
Speaker Frame	SPCC
Diaphragm	Black PET
Magnet	NdFeB
Wires	UL1571, 30AWG
Connector	Molex: 51021-0200

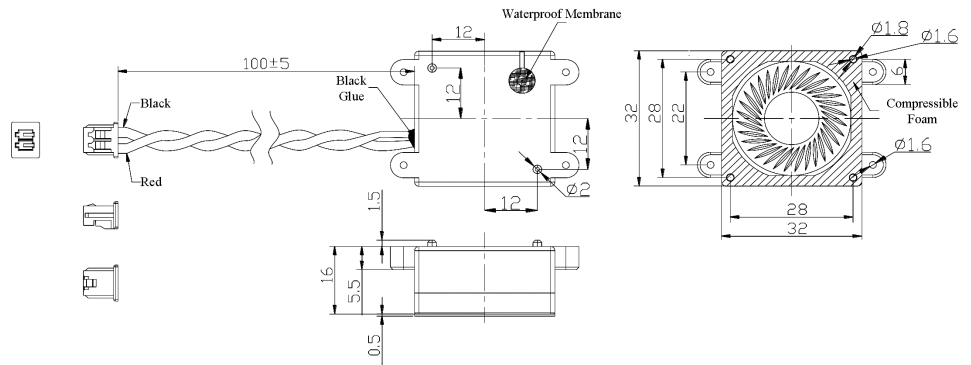

TEMPERATURE RANGES

Operating	-20 to +60 °C
Storage	-30 to +70 °C

General tolerance = ±2 mm: ±0.1 mm, >2 mm: ±0.3 mm and all measurements in mm unless otherwise noted.

Weight	14.5 g
Number of Magnets	1
Speaker Part #	CS30-02P65-04-1X

Revision	Description	By	Date
0-2023	Original Specification.	JL	2023-04-18
1-2024	Updated frequency range.	SK	2024-02-20

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.