

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CAB108SH-03W-1X

Former P/N: SBH-131A

Rev. 1-2018  
 RoHS3 & REACH & IP68  
 Battery Assembly



### Physical Characteristics


#### MATERIALS

Housing	Plastic, ABS Resin, Black
Contact	Springs: 65C Spring Wire Steel Nickel Plated, Rivets: Brass Nickel Plated
Wire	UL 1007, 24 AWG

#### TEMPERATURE RANGES

Operating	-20 to +65 °C
Storage	-30 to +85 °C

Cell Type Safety Holder, or equivalent

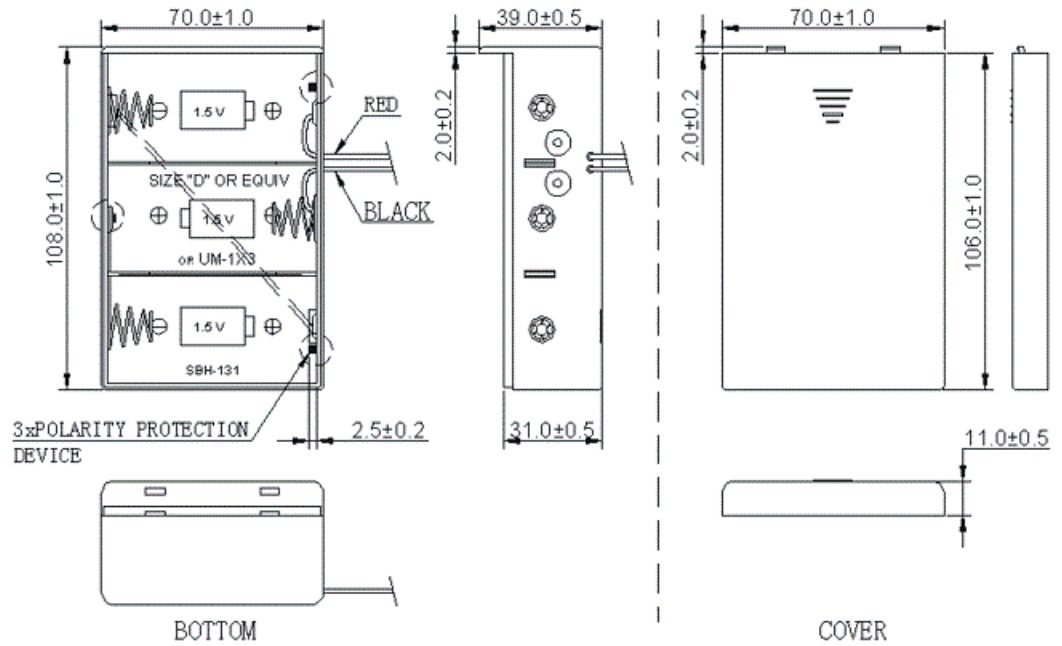

Revision	Description	By	Date
1-2018	Migrate to new format	WS	2017-11-01

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.  
 ©2019 Challenge Electronics, Inc. 20190826154534