



PRODUCT INFORMATION



PART #	C1103SW-2400-N1	Revision: 0-2018
BACKUP ALARM		





DESCRIPTION	FEATURES
Challenge Electronics Indicator; 103 mm Length; Speaker Assembly; Wire Termination; 24 Vdc Maximum Voltage; Multi-Frequency (00); White Noise Tone; Version 1	<ul style="list-style-type: none"> Flame Retardant Plastic RoHS, Lead Free REACH (SVHC) Compliant ISO 9001 Certified


SPECIFICATIONS										
Alarm Type	White Noise Tone		Sound Frequency	-		Cycle Rate	1.47 ± 10% Cycles per Second			
Operating Voltage	12 - 24 Vdc		Rated Voltage	14 Vdc						
Sound Pressure Level	Minimum 102 ± 4 dB(A) at 4 ft.									
Operating Current	Maximum 600 mA									
Operating Temperature	-40°C to +85°C		Storage Temperature	-40°C to +85°C						
Material	Housing	Nylon				Sound Port Opening	Side			
	Termination	Wire Leads								
Physical Dimensions	Length (L)	103 mm	Width (W)	44.5 mm	Height	68 mm	Mounting Screws Spacing	77.5 - 84 mm		
Approximate Weight	320 grams ± 10 %		Removable Washing Label	No		Compliance	RoHS, Lead Free, and REACH (SVHC)			
Options										

Warranty	For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair
-----------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

DIMENSIONS	Units in: mm Tolerance: ± 1.0 mm	Current vs. Input Voltage Response
-------------------	----------------------------------	-------------------------------------------

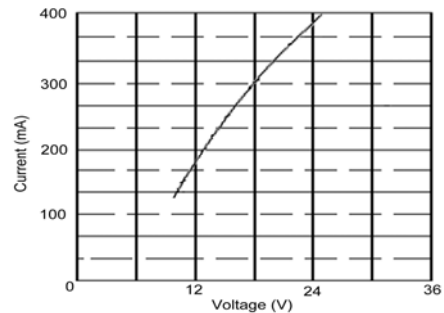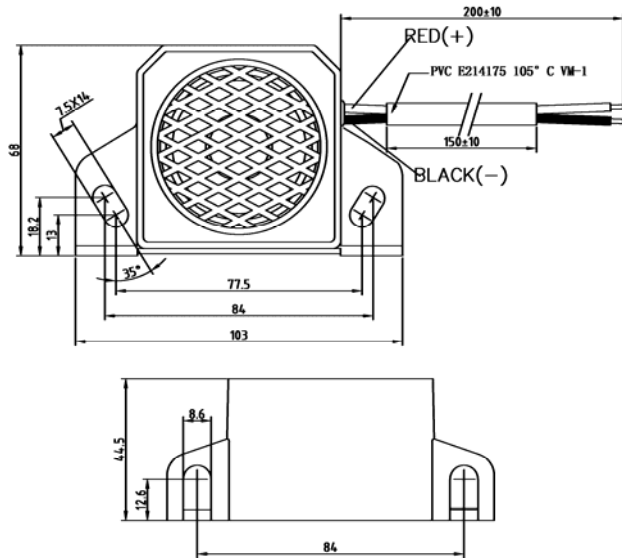

TEST SETUP

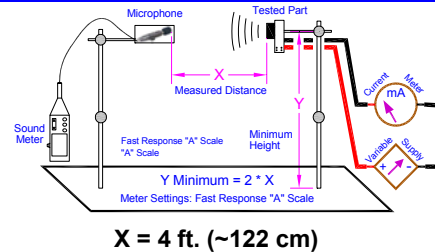

SUBSTANCE OF VERY HIGH CONCERN (REACH) and RoHS LEAD FREE COMPLIANCE

This product does NOT contain any of the REACH Substances of Very High Concern (SVHC), and complies with European Union REACH Regulation No.1907/2006 regarding chemical substances that must be registered and disclosed

Lead (Pb) / Lead Compounds	≤1,000 ppm	≤ 10,000 ppm	Poly Brominated Diphenyl Ethers (PBDE)	≤1,000 ppm	In compliance
Mercury (Hg) / Mercury Compounds	≤1,000 ppm	In compliance	Bis (2-Ethylhexyl) Phthalate (DEHP)	≤1,000 ppm	In compliance
Cadmium (Cd) / Cadmium Compounds	≤ 100 ppm	In compliance	Butyl Benzyl Phthalate (BBP)	≤1,000 ppm	In compliance
Hexavalent Chromium (Cr _{VI})	≤1,000 ppm	In compliance	Dibutyl Phthalate (DBP)	≤1,000 ppm	In compliance

In Challenge Electronics role as Supplier, we have taken the necessary steps towards our China Manufacturing in order to get a written confirmation about their knowledge of the Regulation and their analysis of the impact on their company

Revision	Description	By	Date
0-2018	Initial Specification Sheet	JL	2018-06-18