

## CI12E-07T230-C-3

Former P/N: CEEB12A095-407C23P7.6LR

Rev. 4-2020  
RoHS3 & REACH  
Electromagnetic Indicators




### Operating Characteristics

#### ELECTRICAL

Rated Voltage	5 VDC
Operating Voltage	4 to 7 VDC
Max Current at Vmax	30 mA

#### ACOUSTIC

Tone Category	Continuous
Description	Steady
Center $f$	2300 $\pm$ 300 Hz
Min SPL at Vrated	85 dB
Test Conditions	10 cm

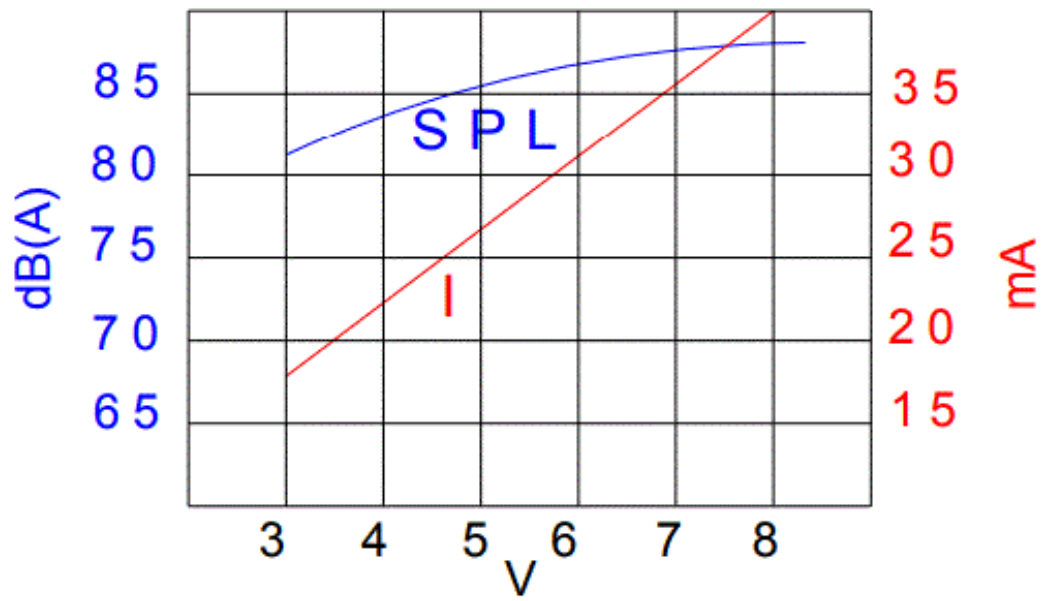

### Physical Characteristics


#### MATERIALS

Housing	Noryl PX9406
Diaphragm	Nickel
PC Pin	Tin Plated

#### TEMPERATURE RANGES

Operating	-30 to +70 °C
Storage	-40 to +85 °C

Weight 2 g

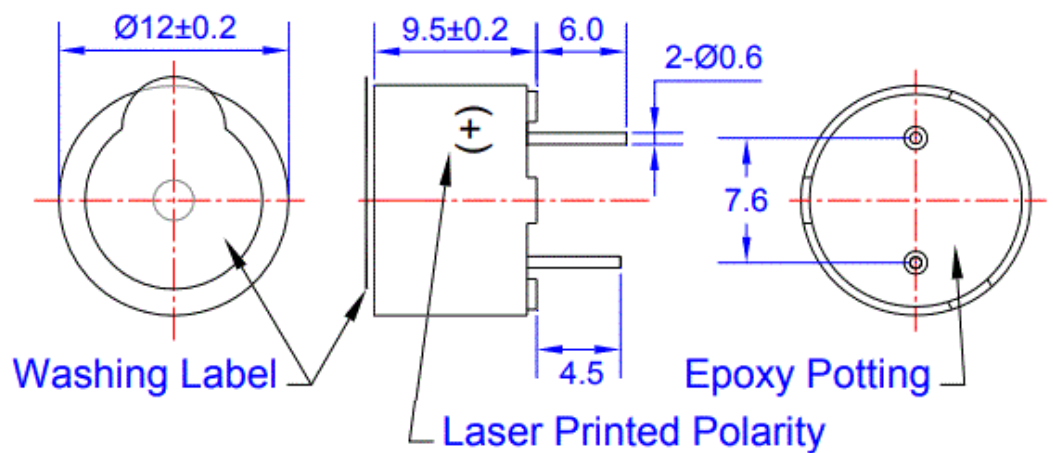

Revision	Description	By	Date
3-2019	Migrate to new format	YK	2019-06-21
4-2020	Update mechanical DWG to remove old PN and Date Code	WS	2020-03-09

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.