


INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CI23P-16T350-C-1

Former P/N: CE-CT-516-2310

Rev. 3-2019
 RoHS3 & REACH
 Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	12 VDC
Operating Voltage	5 to 16 VDC
Max Current at Vmax	9 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center f	3500 \pm 500 Hz
Min SPL at Vrated	78 dB
Test Conditions	61 cm

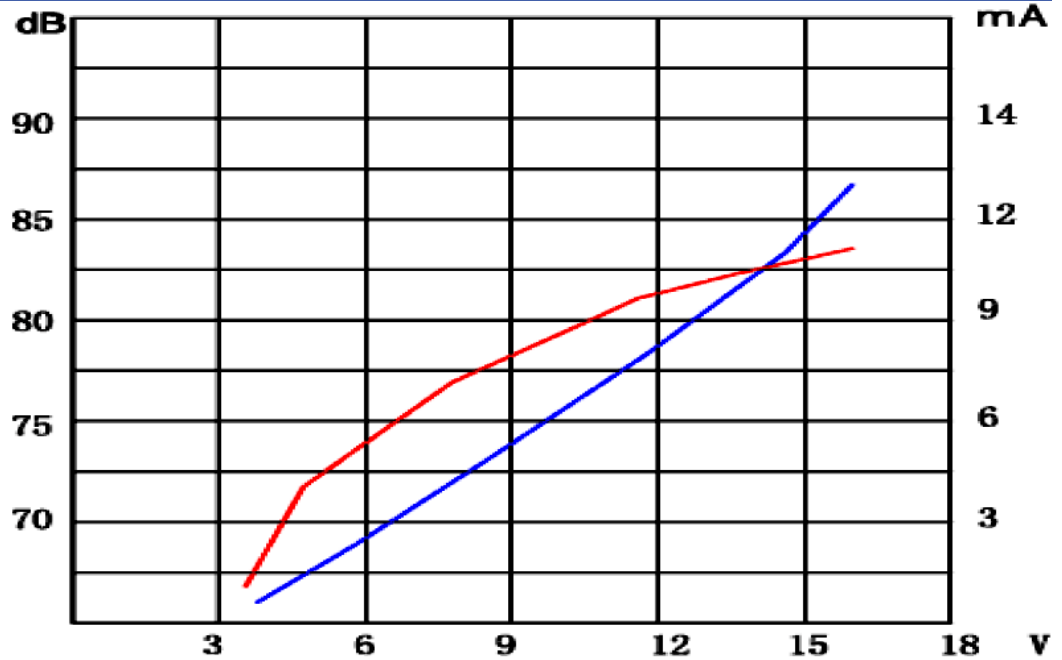

Physical Characteristics


MATERIALS

Housing	MPPO
Diaphragm	Stainless Steel
PC Pin	Brass

TEMPERATURE RANGES

Operating	-20 to +65 °C
Storage	-30 to +80 °C

Weight	4 g
--------	-----

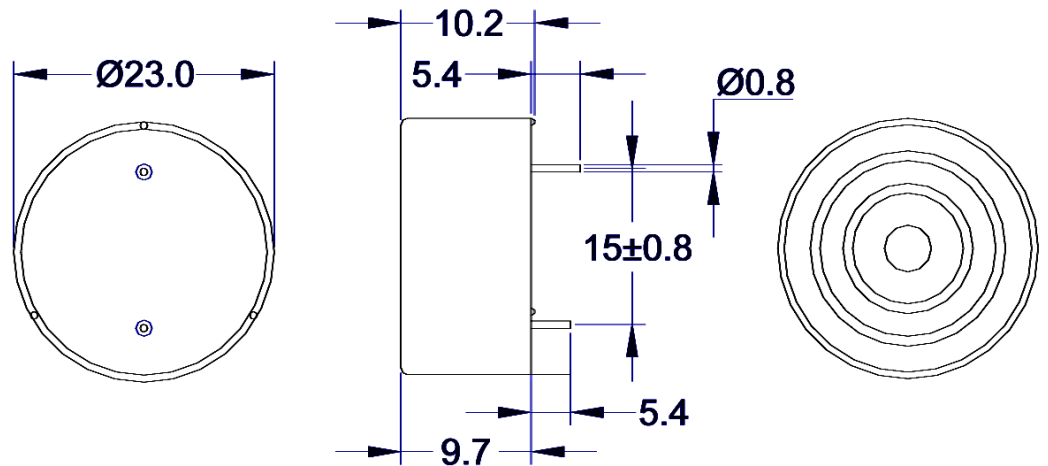

Revision	Description	By	Date
3-2019	Migrate to new format	YK	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.