

CI25P-16T290-C-1

Former P/N: CE-C80

Rev. 14-2019
RoHS3 & REACH
Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	12.0 VDC
Operating Voltage	5.0 to 16.0 VDC
Max Current at Vmax	40 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center f	2900 \pm 250 Hz
Min SPL at Vrated	98 dB
Test Conditions	61 cm

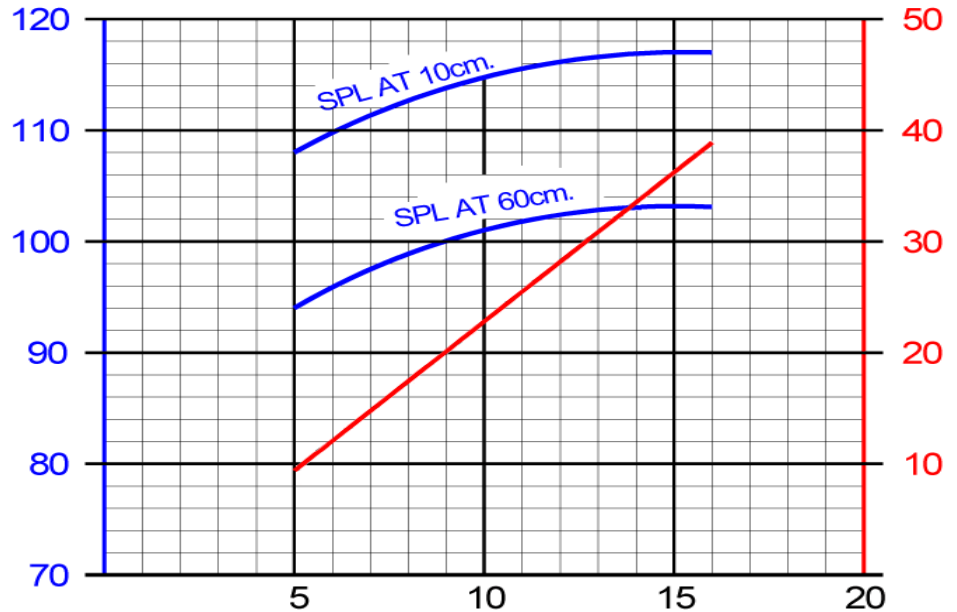

Physical Characteristics


MATERIALS

Housing	Noryl
Diaphragm	Stainless Steel
PC Pin	Brass Electro-Tin Plated

TEMPERATURE RANGES

Operating	-30 to +65 °C
Storage	-40 to +100 °C

Weight 11 g

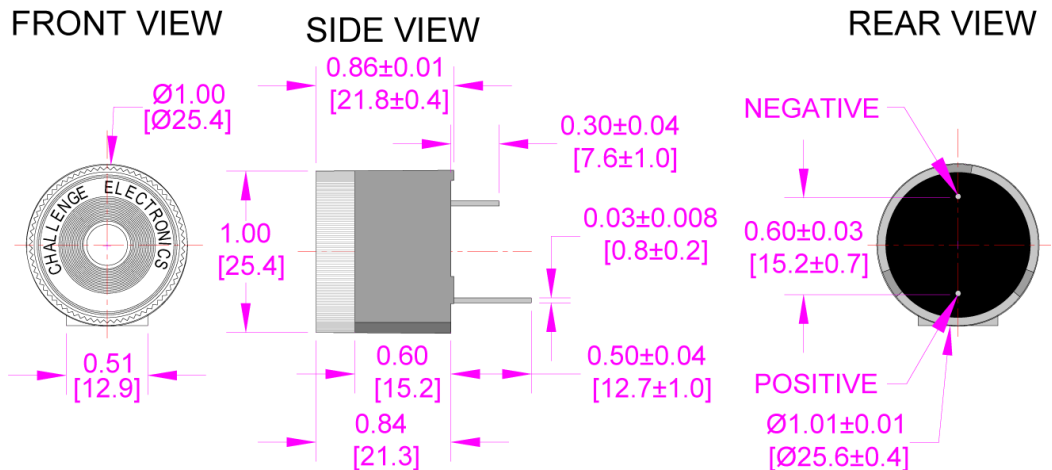

Revision	Description	By	Date
13-2018	Updated Operating Current at 5VDC from 8 mA to 10 mA.	JL	2018-07-10
14-2019	Migrated to New Format.	WS	2019-05-15

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.