

CI26P-16T40-C-1

Former P/N: CI26PT-1640-C1

 Rev. 2-2019
 RoHS3 & REACH
 Piezoelectric Indicators


Operating Characteristics


ELECTRICAL

| | |
|---------------------|-------------|
| Rated Voltage | 12 VDC |
| Operating Voltage | 8 to 16 VDC |
| Max Current at Vmax | 60 mA |

ACOUSTIC

| | |
|-------------------|------------------|
| Tone Category | Continuous |
| Description | Steady |
| Center f | 400 \pm 100 Hz |
| Min SPL at Vrated | 95 dB |
| Test Conditions | 10 cm |

Typical Output Sound Level ± 4
 dB(A), with Type 2 Meter

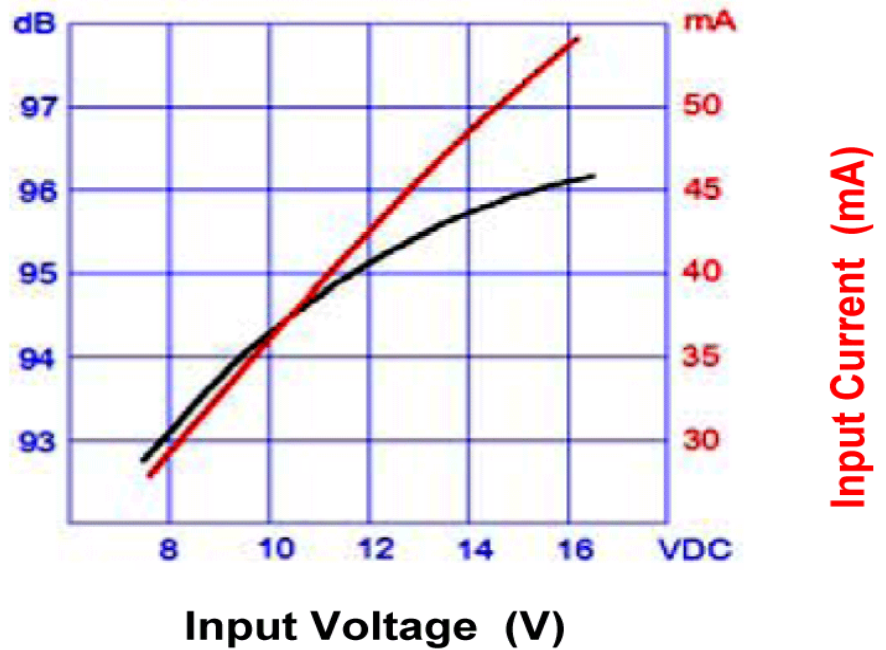

Physical Characteristics


MATERIALS

| | |
|-----------|------------------|
| Housing | Black Noryl |
| Diaphragm | Nickel Alloy |
| PC Pin | Tin Plated Brass |

TEMPERATURE RANGES

| | |
|-----------|----------------|
| Operating | -40 to +105 °C |
| Storage | -40 to +105 °C |

Weight 7.5 g

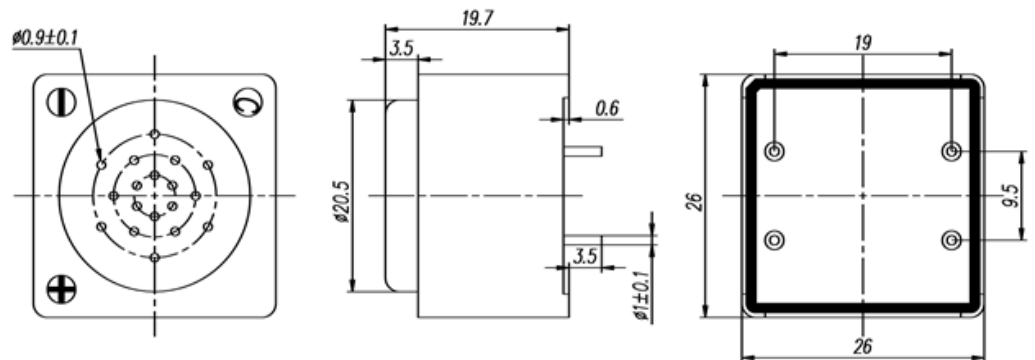

| Revision | Description | By | Date |
|----------|--|----|------------|
| 1-2018 | Updated mechanical drawing pin length from 8 mm to 3.5 mm. | JL | 2018-04-18 |
| 2-2019 | Migrate to new format | JL | 2019-09-09 |

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.