

CI26P-18T290-C-1

Rev. 0-2020
RoHS3 & REACH
Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	12 VDC
Operating Voltage	3 to 18 VDC
Max Current at Vmax	40 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center f	2900 \pm 500 Hz
Min SPL at Vrated	107 dB
Test Conditions	10 cm

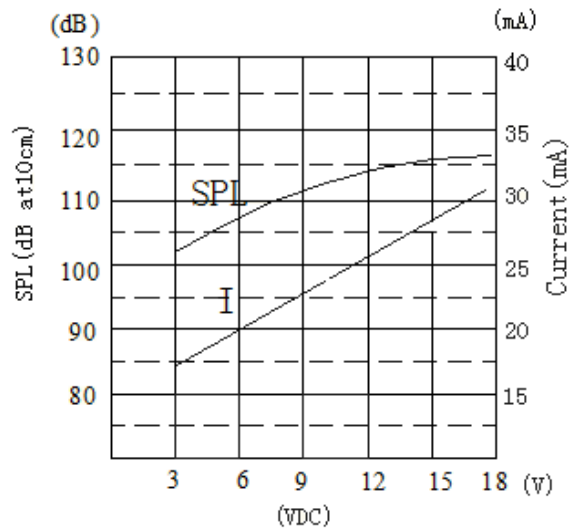

Physical Characteristics

MATERIALS


Housing	Noryl
Diaphragm	Stainless Steel
Through-hole Pins	Brass

TEMPERATURE RANGES

Operating	-40 to +85 °C
Storage	-40 to +85 °C

Weight 12 g

Unless otherwise specified, tolerance: ± 0.5 (unit:mm)

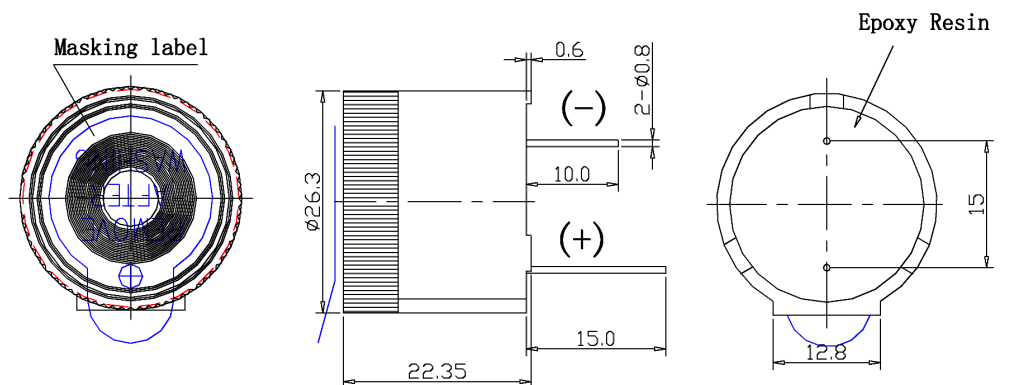

Revision	Description	By	Date
0-2020	Initial Specification Sheet	JL	2020-01-20

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.