

CI35P-30E240-C-10X

Rev. 5-2021
RoHS3 & REACH
IP68 & JDM H31
Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	12 VDC
Operating Voltage	6 to 30 VDC
Max Current at Vmax	35 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center f	2400 \pm 300 Hz
Min SPL at Vmin	71 dB
Min SPL at Vmax	88 dB
Test Conditions	61 cm

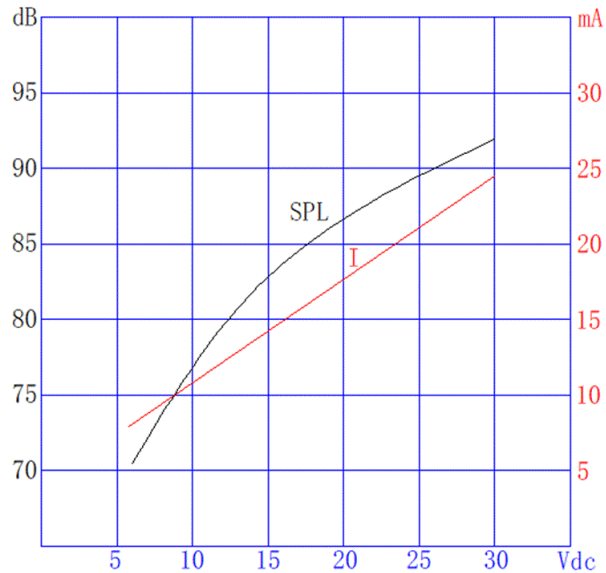

Physical Characteristics

MATERIALS


Housing	MPPO
Diaphragm	Stainless Steel
Terminal	Brass, Tin-plated

TEMPERATURE RANGES

Operating	-30 to +65 °C
Storage	-40 to +90 °C

Weight 25 g

Tolerance: +/-0.75mm

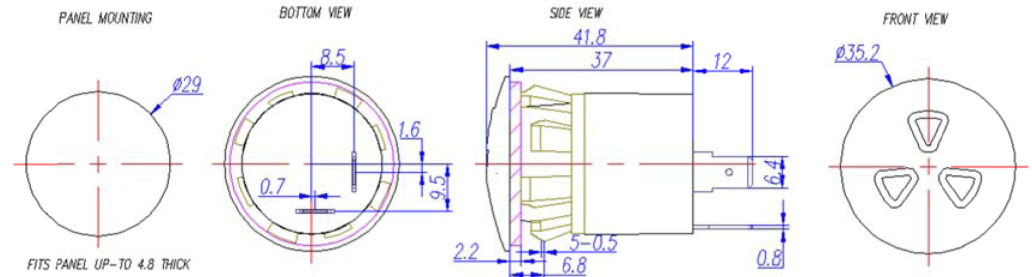

All Measurements are mm unless noted otherwise.

Revision	Description	By	Date
4-2020	Added Panel Mounting to mechanical drawing. Adjusted values to standardize drawing across all parts with this housing style. Updated housing material call out from PPO to MPPO, terminal material call out from Electro-Tin Plated Brass to Brass, Tin-Plated, and weight from 23 g to 25 g.	JL	2020-08-25
5-2021	Updated IP rating to IP68 from IP67.	CT	2021-08-09

Warranty: For a period of two (2) years from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair. IP Rating ensures functionality after water has been drained fully from device.