

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CI36P-15W290-C-7X

Former P/N: CEC-713X-1

Rev. 10-2019
RoHS3 & REACH & 300 HR ASTM B117 & IP65
Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	13.8 VDC
Operating Voltage	2 to 15 VDC
Max Current at Vmax	70 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center f	2900 ± 500 Hz
Min SPL at Vmin	77 dB
Min SPL at Vmax	100 dB
Test Conditions	61 cm

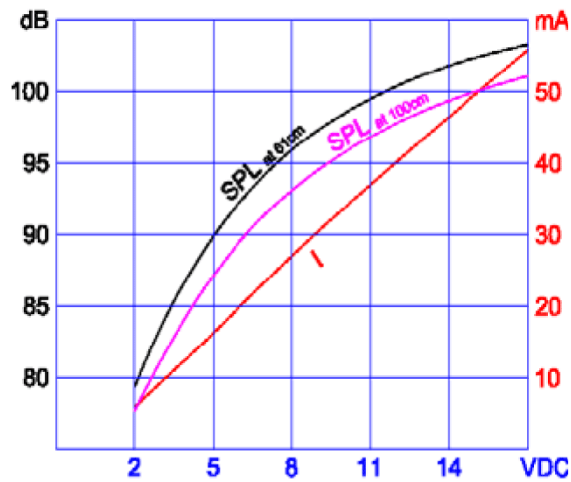

Physical Characteristics


MATERIALS

Housing	Noryl PX9406
Diaphragm	Stainless Steel
Wire	18 AWG, GPT, SAE TYPE 1 Automotive

TEMPERATURE RANGES

Operating	-30 to +65 °C
Storage	-40 to +100 °C

Weight 51 g

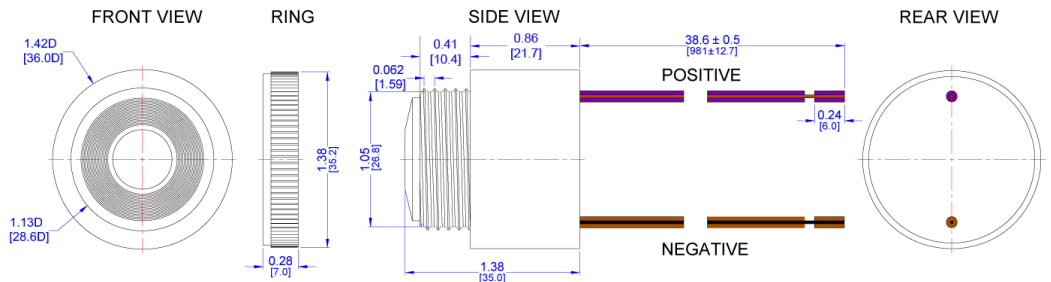

Units in: Inches / (mm), Tolerance: ± 0.03 / (± 0.7)

Revision	Description	By	Date
9-2018	Updated Mechanical Drawing. Increased Max Current at Vmax from 60 mA to 70 mA.	JL	2018-11-29
10-2019	Migrate to new format	CF	2019-06-24

Warranty: For a period of two (2) years from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.
©2019 Challenge Electronics, Inc. 20190826153432