

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CI36P-30E290-P-15X

Former P/N: CE-BX630AQS

Rev. 6-2019
RoHS3 & REACH & 300 HR ASTM B117 & IP65
Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	24 VDC
Operating Voltage	6 to 30 VDC
Max Current at Vmax	50 mA

ACOUSTIC

Tone Category	Pulsating
Description	Intermittent
Center f	2900 ± 500 Hz
Pulse f	1 Hz ± 10 %
Min SPL at Vmin	83 dB
Min SPL at Vmax	100 dB
Test Conditions	61 cm

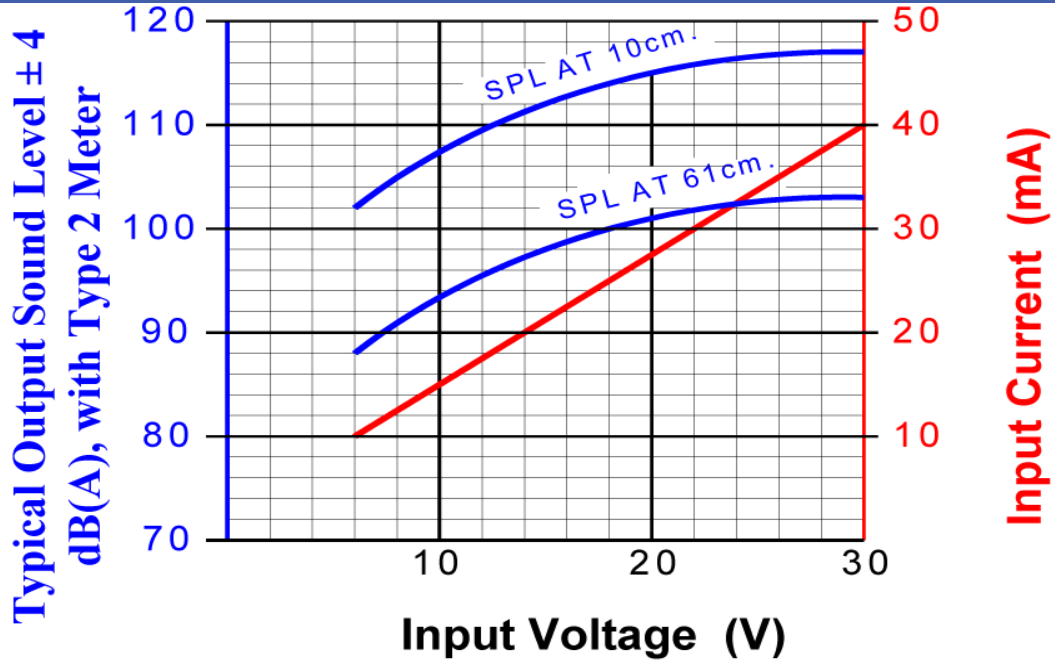

Physical Characteristics


MATERIALS

Housing	Noryl PX9406
Diaphragm	Stainless Steel
Terminal	Electro Tin Plated Brass

TEMPERATURE RANGES

Operating	-30 to +65 °C
Storage	-40 to +105 °C

Weight 35 g

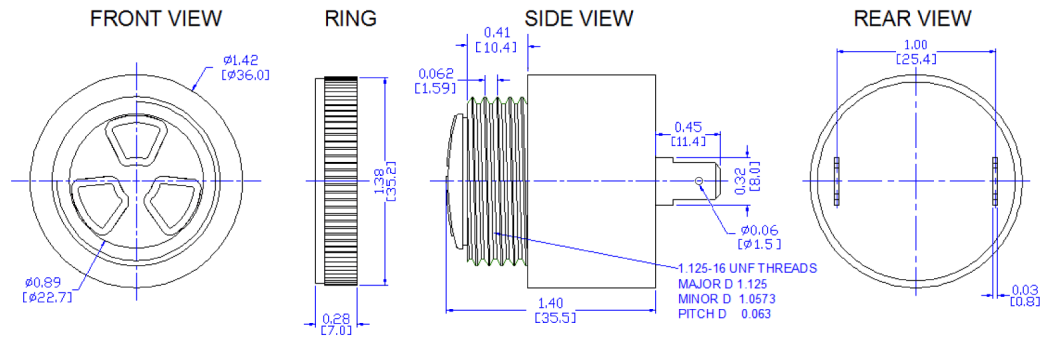

Revision	Description	By	Date
6-2019	Migrate to new format	YK	2019-06-20

Warranty: For a period of two (2) years from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.