

CI36P-30W290-M-8X

Former P/N: CE-BCX630AWS

Rev. 1-2019
RoHS3 & REACH & 300 HR ASTM B117 & IP65
Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	24 VDC
Operating Voltage	6 to 30 VDC
Max Current at Vmax	40 mA

ACOUSTIC

Tone Category	Pulsating
Description	Intermittent
Center <i>f</i>	2900 ± 500 Hz
Pulse <i>f</i>	1 Hz ± 10 %
Tone Category	Continuous
Description	Steady
Center <i>f</i>	2900 ± 500 Hz
Min SPL at Vmin	83 dB
Min SPL at Vmax	100 dB
Test Conditions	61 cm

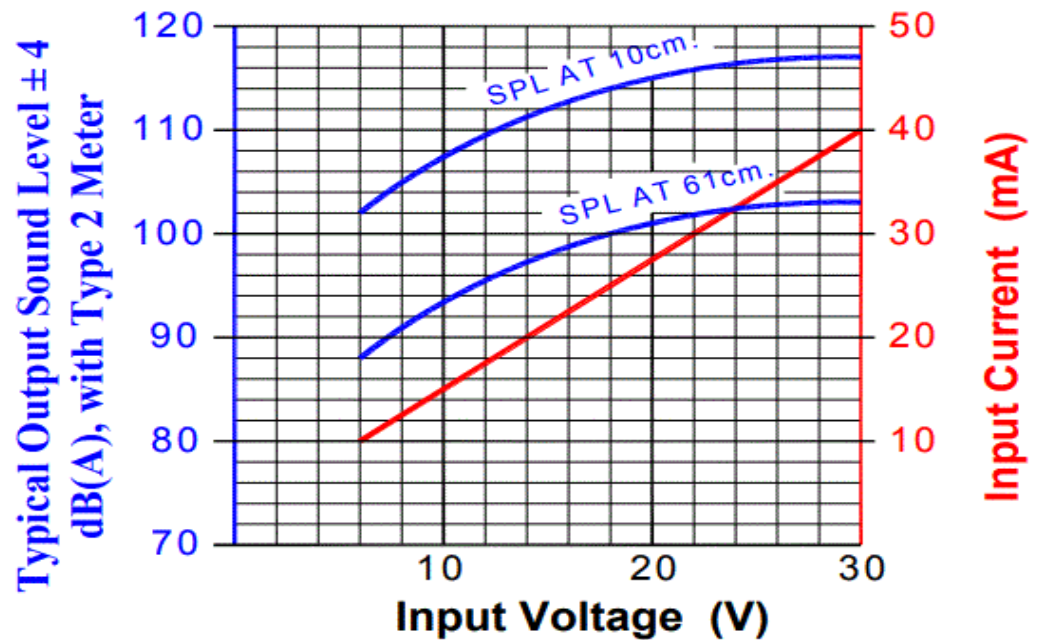

Physical Characteristics


MATERIALS

Housing	Noryl PX9406
Diaphragm	Stainless Steel
Wire	18 AWG, GXL Automotive, Copper, XPLE insulated

TEMPERATURE RANGES

Operating	-30 to +65 °C
Storage	-40 to +100 °C

Weight 37 g

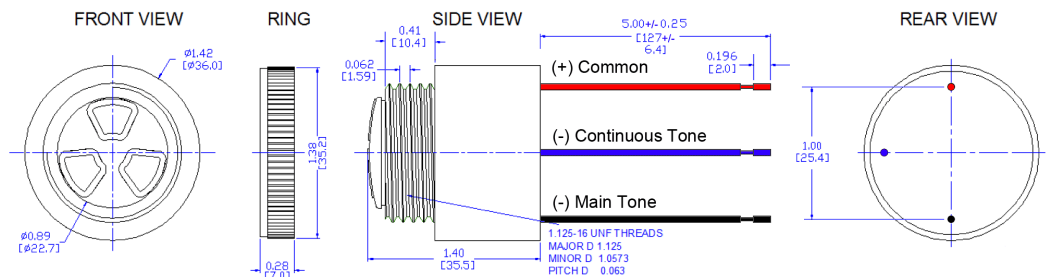

Revision	Description	By	Date
1-2019	Migrate to new format	YK	2019-06-21

Warranty: For a period of two (2) years from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.