

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CI50P-13T250-C-1

Former P/N: CEPB500A290-513C25PR

Rev. 1-2019
RoHS3 & REACH
Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

| | |
|---------------------|-------------|
| Rated Voltage | 12 VDC |
| Operating Voltage | 5 to 13 VDC |
| Max Current at Vmax | 80 mA |

ACOUSTIC

| | |
|-------------------|---------------|
| Tone Category | Continuous |
| Description | Steady |
| Center f | 2500 ± 500 Hz |
| Min SPL at Vrated | 105 dB |
| Test Conditions | 30 cm |

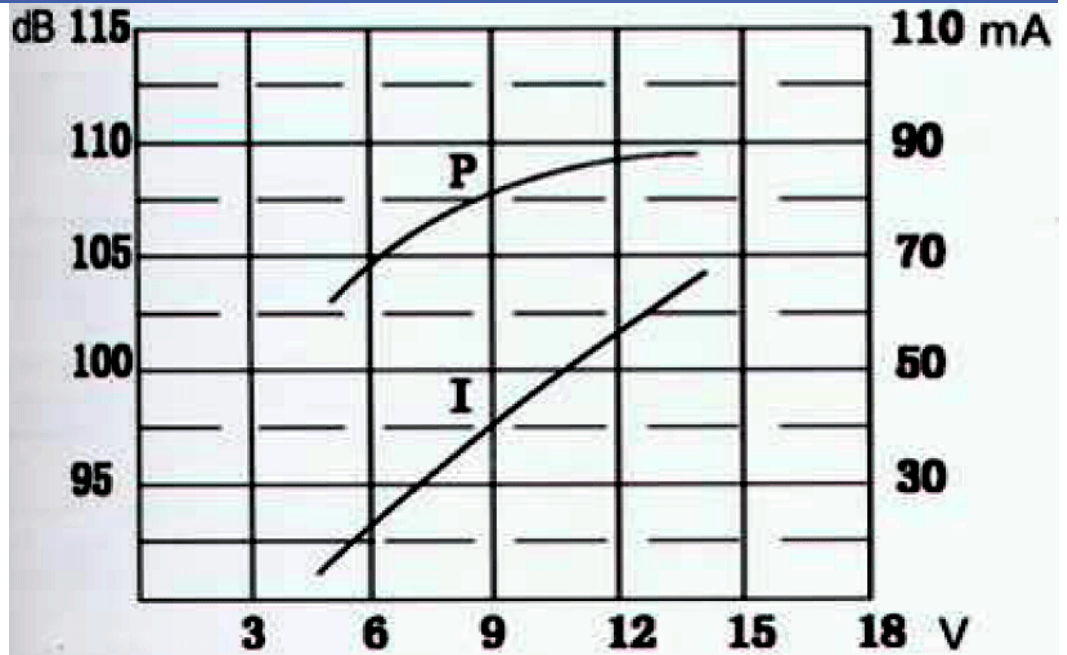

Physical Characteristics


MATERIALS

| | |
|-----------|-------|
| Housing | ABS |
| Diaphragm | Brass |
| PC Pin | Brass |

TEMPERATURE RANGES

| | |
|-----------|---------------|
| Operating | -20 to +60 °C |
| Storage | -30 to +70 °C |

Weight 28 g

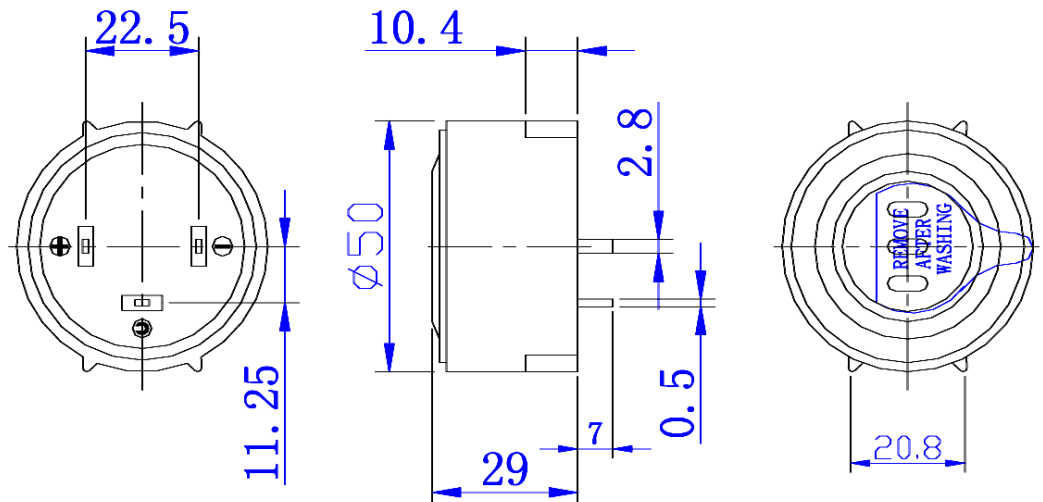

| Revision | Description | By | Date |
|----------|-----------------------|----|------------|
| 1-2019 | Migrate to new format | YK | 2019-06-21 |

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.
©2019 Challenge Electronics, Inc. 20190826153759