

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CI60P-20W280-P-1

Former P/N: CEPB418160-320B28W140R

Rev. 2-2019  
RoHS3 & REACH  
Piezoelectric Indicators




### Operating Characteristics

#### ELECTRICAL

Rated Voltage	5 VDC
Operating Voltage	3 to 20 VDC
Max Current at Vmax	10 mA

#### ACOUSTIC

Tone Category	Pulsating
Description	Intermittent
Center $f$	2800 $\pm$ 500 Hz
Pulse $f$	3.5 $\pm$ 20 Hz
Min SPL at Vrated	85 dB
Test Conditions	30 cm

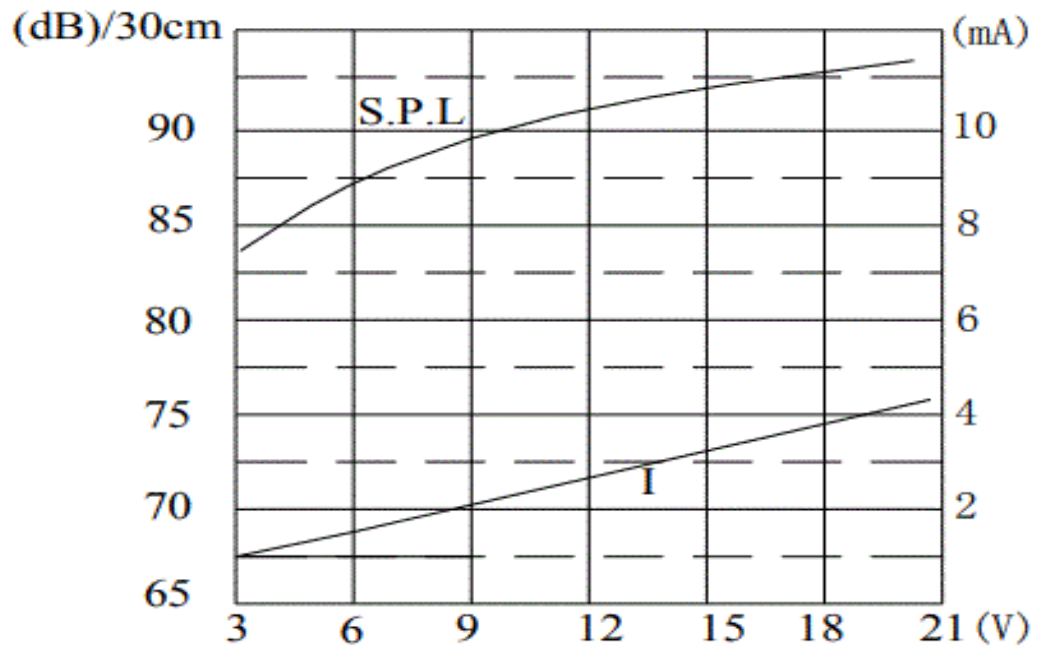

### Physical Characteristics


#### MATERIALS

Housing	ABS
Diaphragm	Brass
Wire	UL 1007, 28 AWG

#### TEMPERATURE RANGES

Operating	-20 to +60 °C
Storage	-30 to +70 °C

Weight	15.0 g
--------	--------

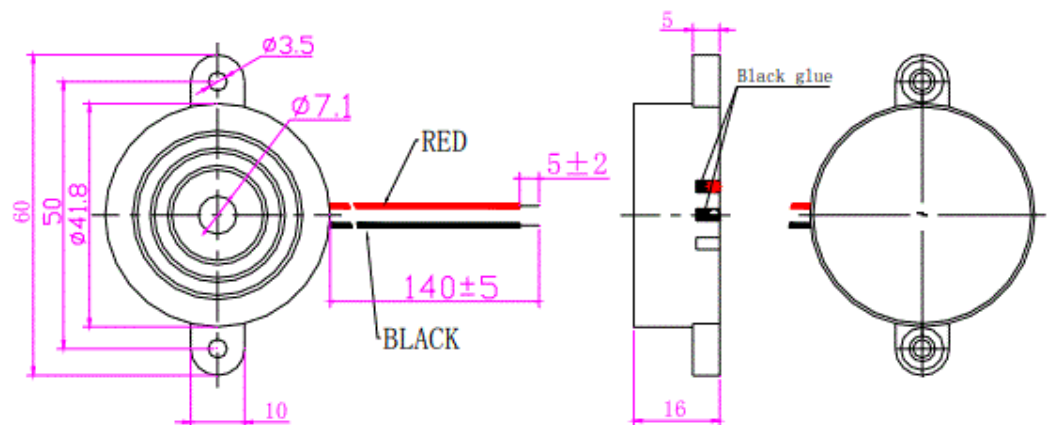

Revision	Description	By	Date
1-2016	Updated Pulse Rate at 5 V and added Pulse Rate at 15 V	WS	2016-02-10
2-2019	Migrate to new format	YK	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.