

CM06M-10P40-BA-5

Rev. 0-2025
 RoHS3 & REACH
 Omni Directional Microphones




Operating Characteristics

ELECTRICAL

Type	Analog
Rated Voltage	2 VDC
Operating Voltage	1 to 10 VDC
Capacitance	N/A
Max Current	0.5 mA
Recommended Bias Resistor	2,200 Ω

ACOUSTIC @ 1000 Hz

Technology	Back Electret
Directionality	Omni Directional
Sensitivity	-40 ± 3 dBV/Pa
Min S/N	58 dB

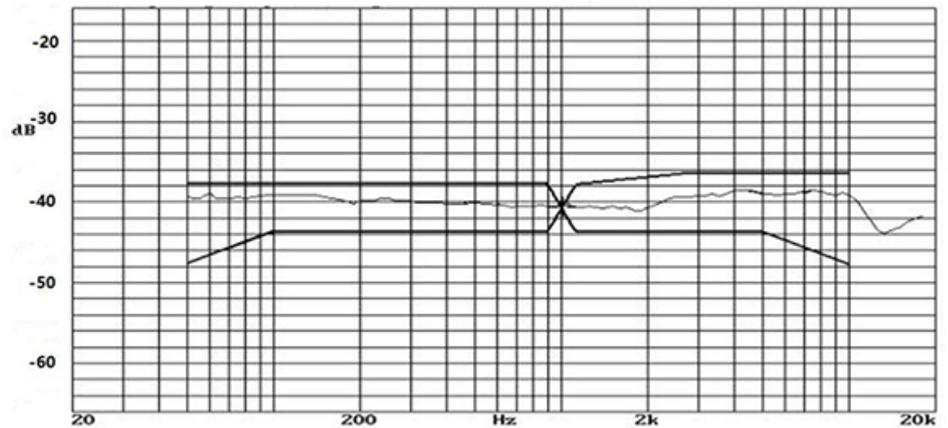

Physical Characteristics


MATERIAL

Housing	Al
Solder Pads	Sn

TEMPERATURE RANGES

Operating	-30 to $+70$ $^{\circ}\text{C}$
Storage	-40 to $+80$ $^{\circ}\text{C}$

Weight 0.15 g

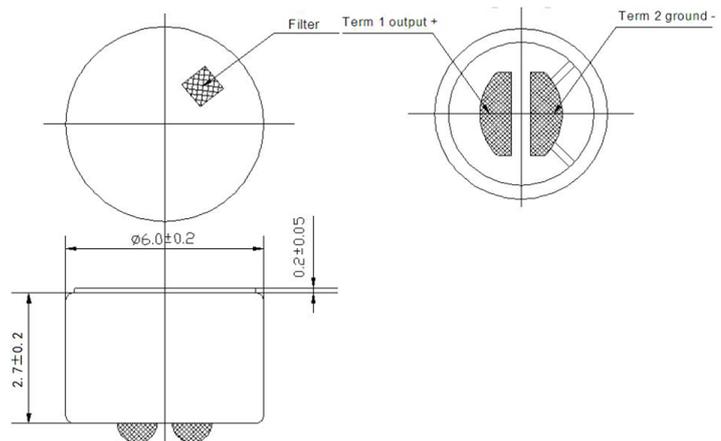

General tolerance = ± 0.2 mm and all measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2025	Original Specification	KG	2025-06-17

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.