

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CT04E-04S400-1

Former P/N: CEET040L020-17-204-40MR

Rev. 1-2019  
RoHS3 & REACH  
Electromagnetic Sound Transducers




### Operating Characteristics

#### ELECTRICAL

Rated Voltage	3 Vo-p
Operating Voltage	2 to 4 Vo-p
Coil Resistance	17 ± 3 Ω
Max Current at V Rated	90 mA

#### ACOUSTIC

Min SPL at V Rated	70 dB
Test Conditions	10 cm
f <sub>o</sub>	4000 ± 500 Hz

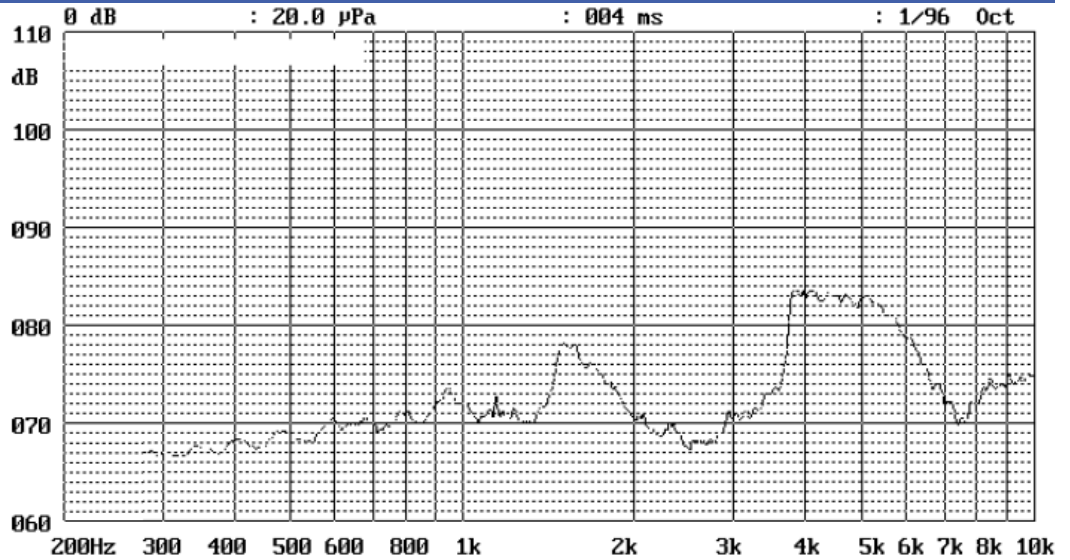

### Physical Characteristics


#### MATERIAL

Housing	LCP
Diaphragm	Iron-Nickel Alloy
Solder Pad	Sn Plated Brass

#### TEMPERATURE RANGES

Operating	-20 to +70 °C
Storage	-30 to +80 °C

Weight 0.1 g

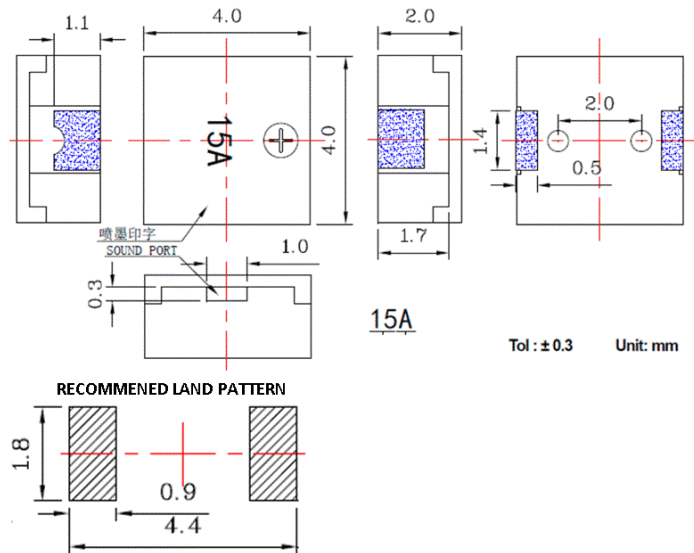

Revision	Description	By	Date
0-2015	Initial Specification Sheet	WS	2015-11-02
1-2019	Migrate to new format	JL	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.

©2019 Challenge Electronics, Inc. 20190826155023