


INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT04E-04S400-2

Former P/N: CEET040M020-17-204-40MR

Rev. 1-2019
RoHS3 & REACH
Electromagnetic Sound Transducers




Operating Characteristics

ELECTRICAL

Rated Voltage	3 Vo-p
Operating Voltage	2 to 4 Vo-p
Coil Resistance	17 ± 3 Ω
Max Current at V Rated	90 mA

ACOUSTIC

Min SPL at V Rated	70 dB
Test Conditions	10 cm
f _o	4000 ± 500 Hz

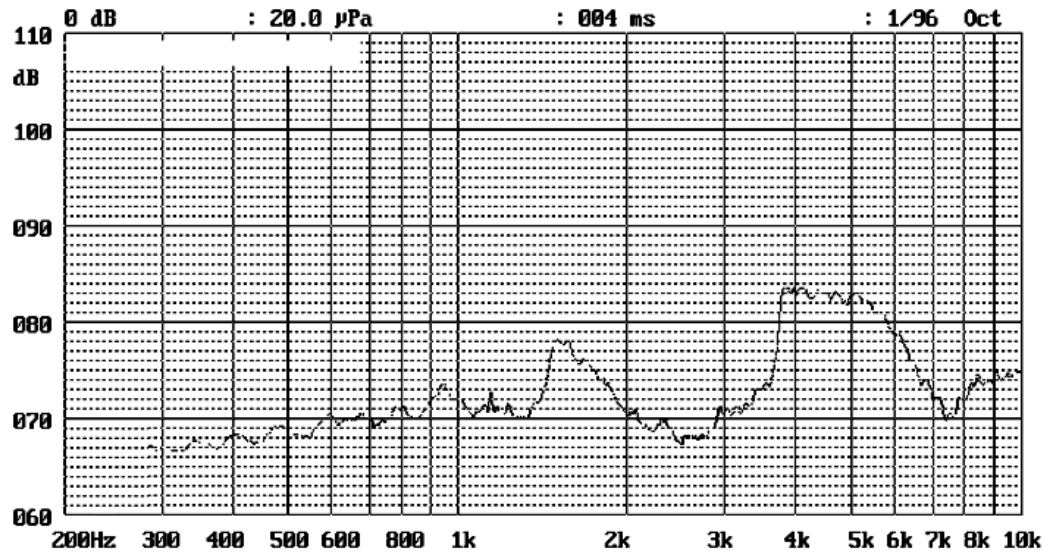

Physical Characteristics


MATERIAL

Housing	LCP
Diaphragm	Iron-Nickel Alloy
Solder Pad	Sn Plated Brass

TEMPERATURE RANGES

Operating	-20 to +70 °C
Storage	-30 to +80 °C

Weight 0.1 g

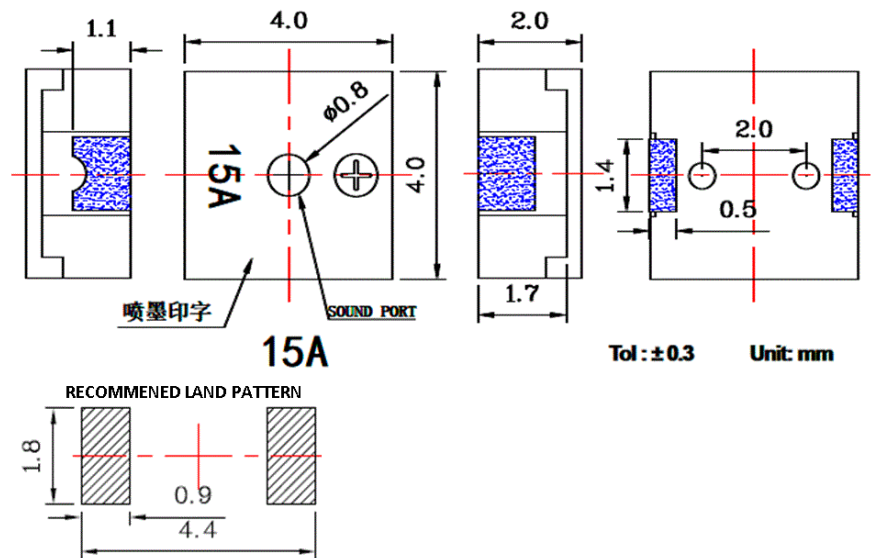

Revision	Description	By	Date
1-2019	Migrate to new format	JL	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.