


INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT14E-03S320-1

Former P/N: CEET140L030-09-102-32MHR

Rev. 2-2019
RoHS3 & REACH
Electromagnetic Sound Transducers




Operating Characteristics

ELECTRICAL

Rated Voltage	1.5 Vo-p
Operating Voltage	1.0 to 3.0 Vo-p
Coil Resistance	9 ± 2 Ω
Max Current at V Rated	65 mA

ACOUSTIC

Min SPL at V Rated	85 dB
Test Conditions	10 cm
f _o	3200 ± 350 Hz

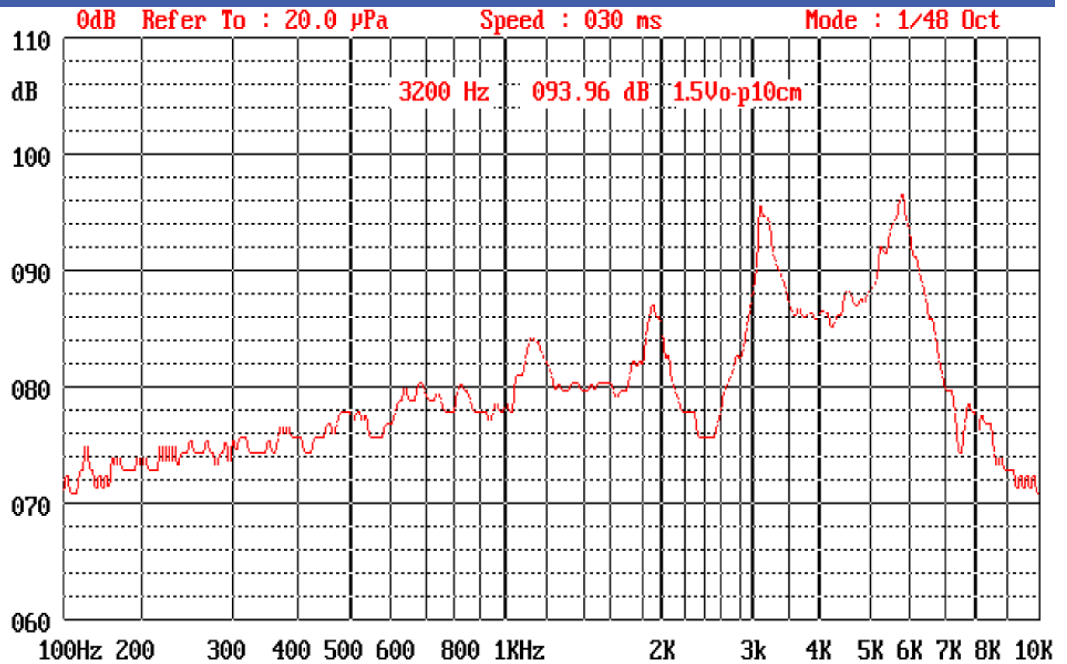

Physical Characteristics


MATERIAL

Housing	Plastic, LCP Vectra E130i
Diaphragm	Ni Alloy Disc N50
Solder Pad	Tin Plated Brass

TEMPERATURE RANGES

Operating	-30 to +85 °C
Storage	-40 to +90 °C

Weight	1 g
--------	-----

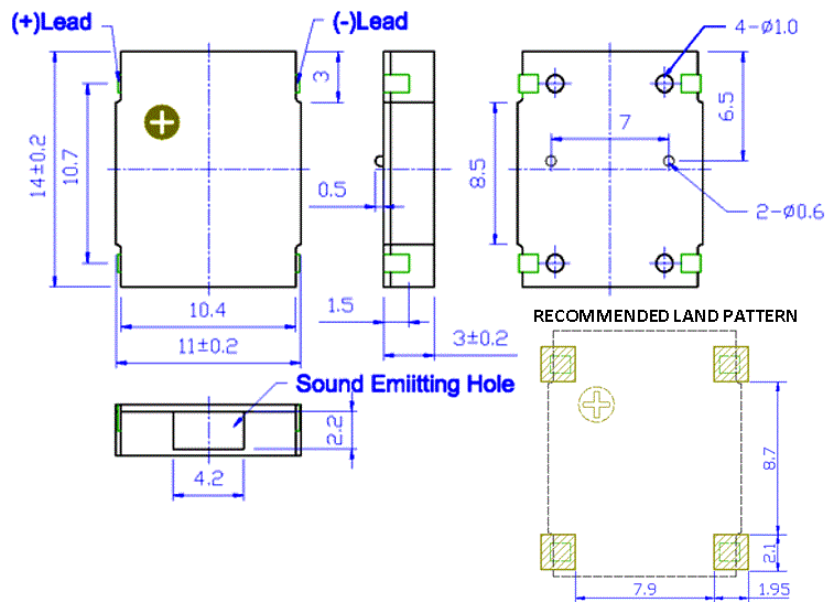

Revision	Description	By	Date
2-2019	Migrate to new format	JL	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.