


INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT16E-03T204-1

Former P/N: CEET160B140-27-103-20P7.6LHR

Rev. 2-2019
RoHS3 & REACH
Electromagnetic Sound Transducers



Operating Characteristics


ELECTRICAL

Rated Voltage	1.5 Vo-p
Operating Voltage	1.0 to 3.0 Vo-p
Coil Resistance	27 ± 3 Ω
Max Current at V Rated	18 mA

ACOUSTIC

Min SPL at V Rated	80 dB
Test Conditions	10 cm
f_o	2048 ± 20 Hz

X: 100.00Hz Y: 35.94dB ZA: Live Curve SSR T. Ha.

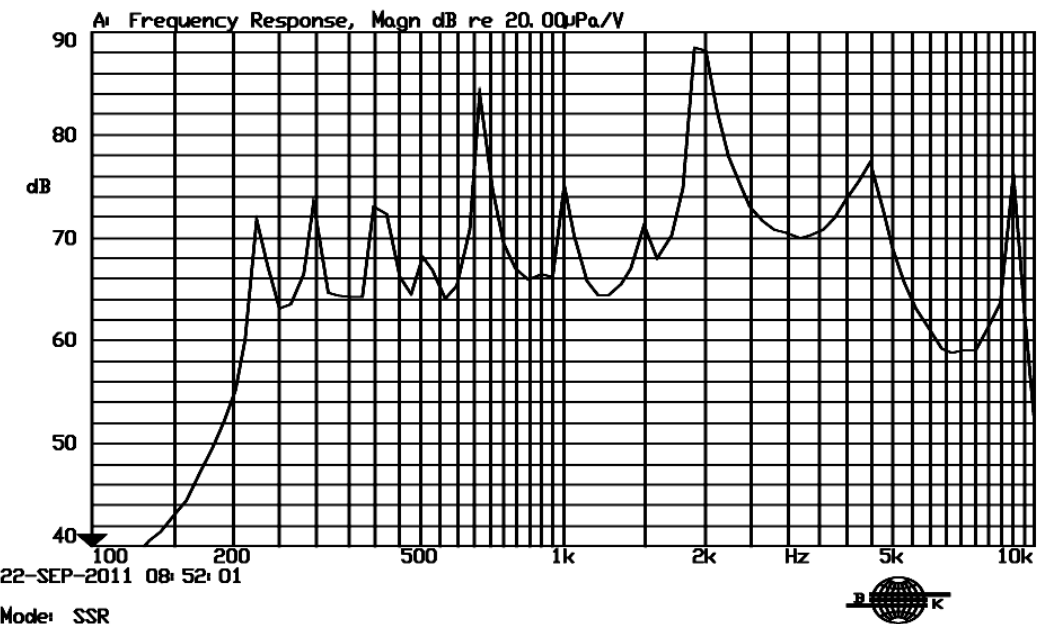

Physical Characteristics


MATERIAL

Housing	Plastic
Diaphragm	Ni-alloy
PC Pin	Tin Plated Copper

TEMPERATURE RANGES

Operating	-40 to +85 °C
Storage	-40 to +85 °C

Weight	5 g
--------	-----

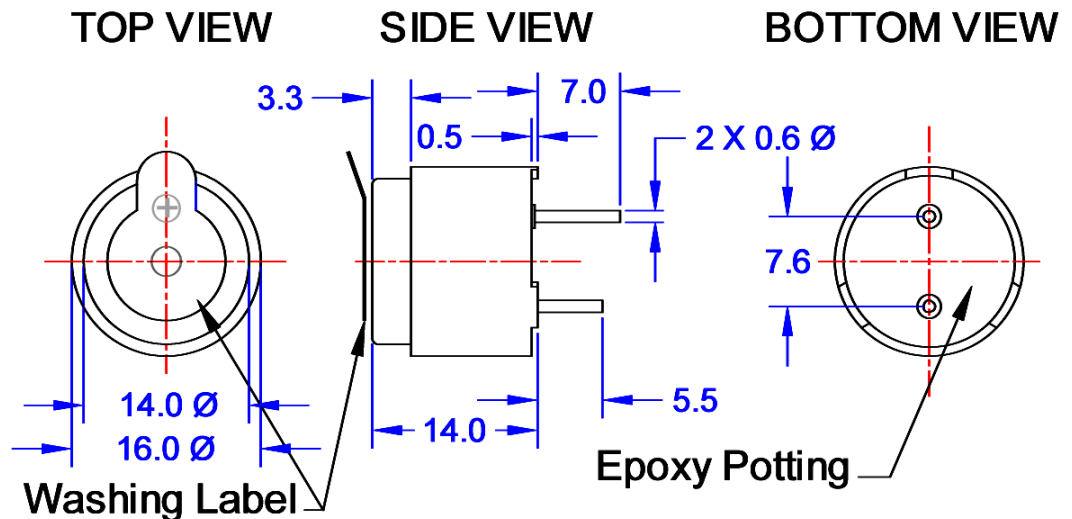

Revision	Description	By	Date
2-2019	Migrate to new format	JL	2019-03-22

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.