

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT16E-08T204-2

Former P/N: CEET160B140-50-408-20P7.6LHR

Rev. 3-2019
RoHS3 & REACH
Electromagnetic Sound Transducers




Operating Characteristics

ELECTRICAL

Rated Voltage	6.0 Vo-p
Operating Voltage	4.0 to 8.0 Vo-p
Coil Resistance	50 ± 6 Ω
Max Current at V Rated	40 mA

ACOUSTIC

Min SPL at V Rated	85 dB
Test Conditions	10 cm
f _o	2048

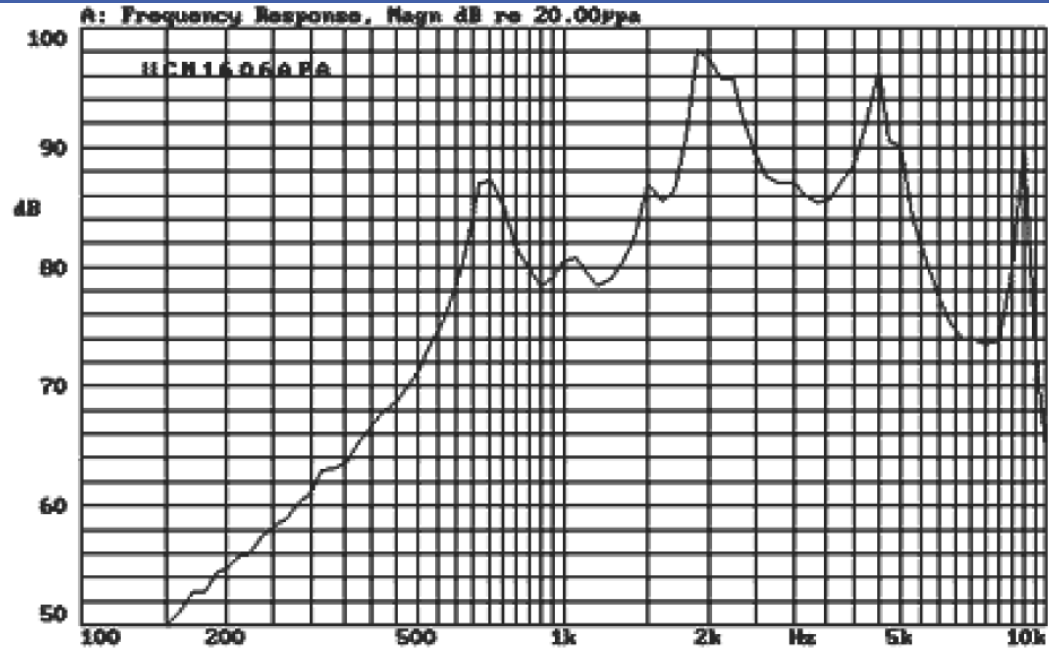

Physical Characteristics

MATERIAL


Housing	B style Plastic, Nory
Diaphragm	Ni-alloy
PC Pin	Tin Plated Copper

TEMPERATURE RANGES

Operating	-40 to +100 °C
Storage	-40 to +100 °C

Weight	5 g
--------	-----

Units in: mm, Tolerance: ± 0.5mm unless specified otherwise.

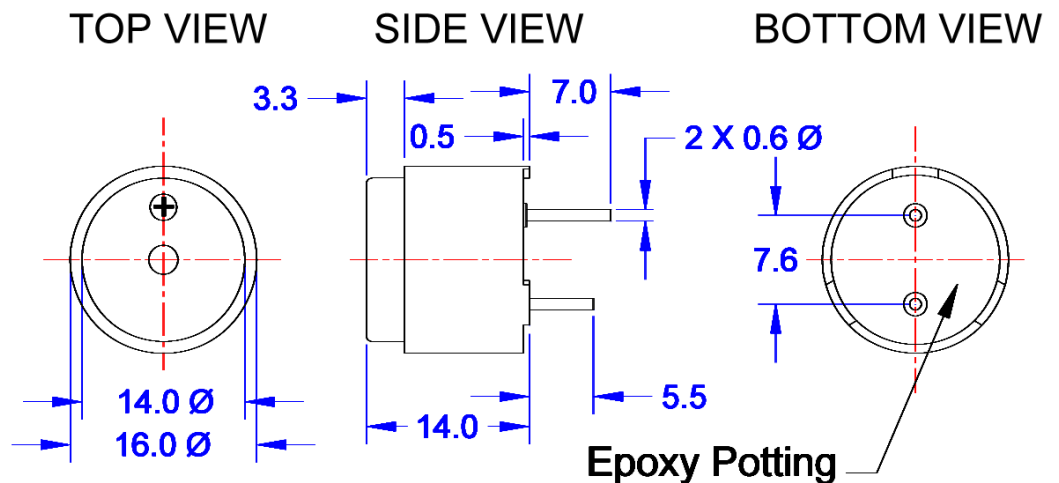

Revision	Description	By	Date
3-2019	Migrate to new format	YK	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.