


INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CT24P-30W550-1

Former P/N: CEPT240A040-130-55W63R

Rev. 1-2019  
RoHS3 & REACH  
Piezoelectric Sound Transducers




### Operating Characteristics

#### ELECTRICAL

Rated Voltage	15 Vp-p
Max Operating Voltage	30 Vp-p
Max Current at V Rated	8 mA
Capacitance	18000 pF ± 30 % 100 Hz

#### ACOUSTIC

Min SPL at V Rated	95 dB
Test Conditions	10 cm
f <sub>o</sub>	5500 ± 1000 Hz

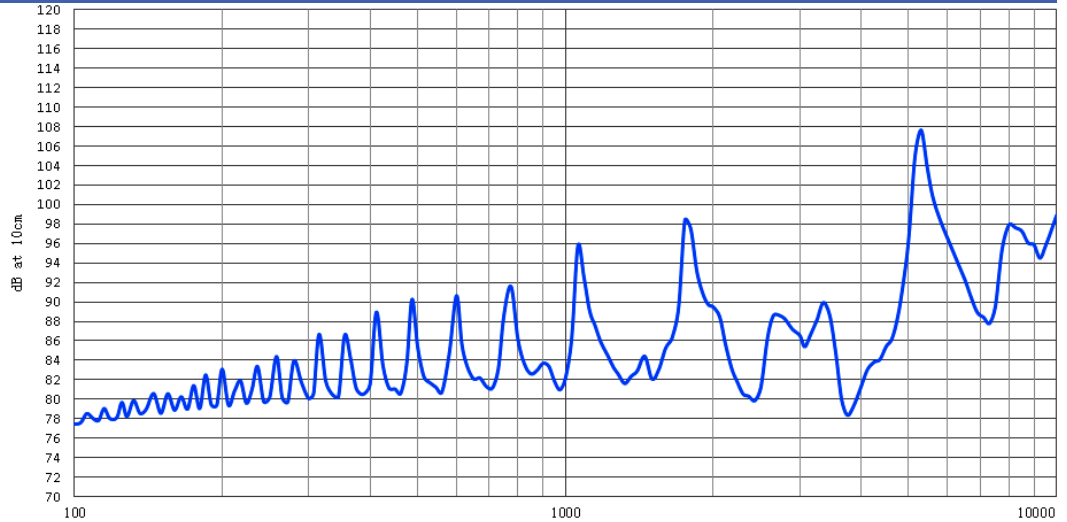

### Physical Characteristics


#### MATERIALS

Housing	Noryl
Diaphragm	Brass
Wire	28 AWG, UL 1007
Connector	Molex 51021

#### TEMPERATURE RANGES

Operating	-30 to +70 °C
Storage	-40 to +85 °C

Weight 1.9 g

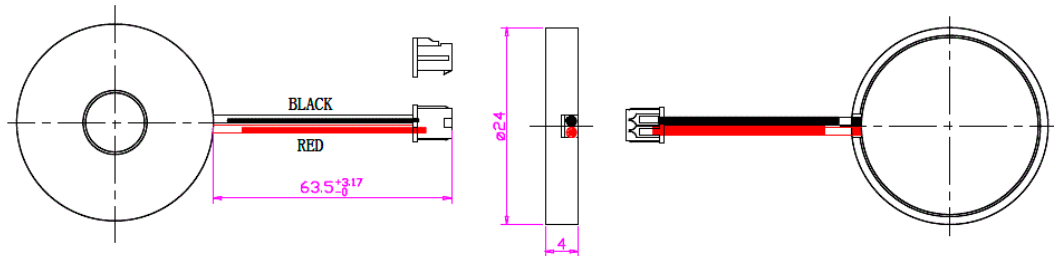

Revision	Description	By	Date
1-2019	Migrate to new format	JL	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.  
©2019 Challenge Electronics, Inc. 20190826155520