


## CT15P-25S410-1

Former P/N: CT11PS-25410-1

Rev. 1-2019  
RoHS3 & REACH  
Piezoelectric Sound Transducers




### Operating Characteristics

#### ELECTRICAL

Rated Voltage	5 Vp-p
Max Operating Voltage	25 Vp-p
Max Current at V Rated	3 mA
Capacitance	13000 pF ± 30 % 1000 Hz

#### ACOUSTIC

Min SPL at V Rated	85 dB
Test Conditions	10 cm
$f_0$	4100 Hz

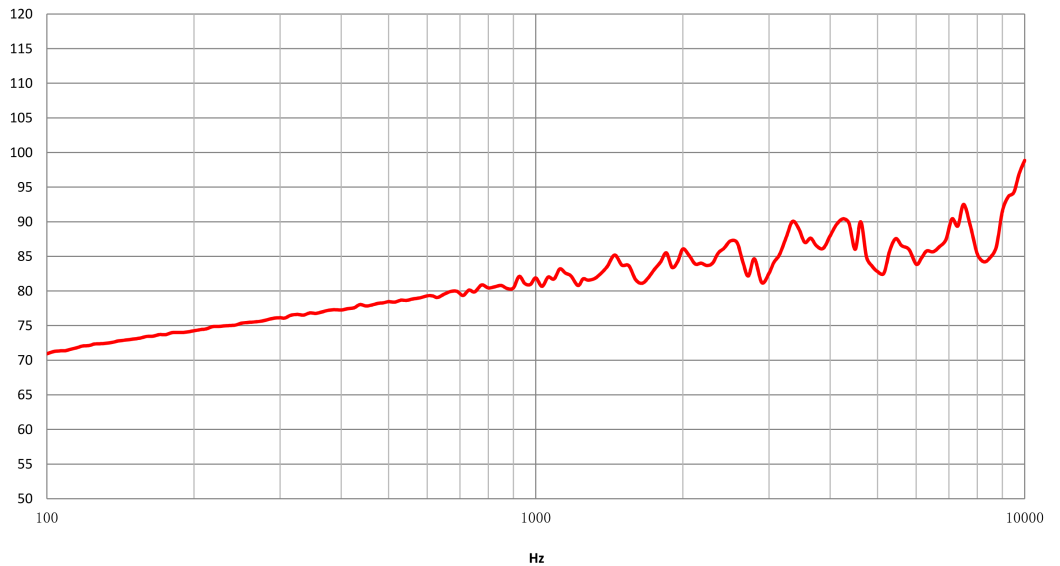

### Physical Characteristics


#### MATERIALS

Housing	White LCP
Diaphragm	Nickel
Solder Pad	Tin Plated Brass

#### TEMPERATURE RANGES

Operating	-30 to +70 °C
Storage	-40 to +85 °C

Weight	0.2 g
--------	-------

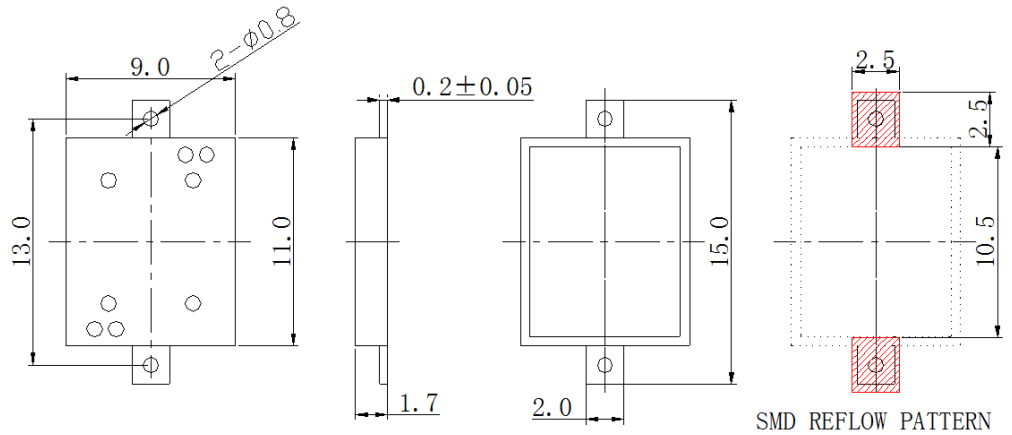

Revision	Description	By	Date
1-2019	Migrate to new format	WS	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.