


CT27Z-30N400-1

Rev. 0-2025
RoHS3 & REACH
Piezo Element Sound Transducers



Operating Characteristics

ELECTRICAL

| | |
|------------------------|-------------------------------|
| Max Operating Voltage | 30 Vp-p |
| Max Resonant Impedance | 2,000 Ω |
| Capacitance | 22,000 pF \pm 30% 100 Hz |

ACOUSTIC: Free Air

| | |
|-------|----------|
| f_o | 4,000 Hz |
|-------|----------|

Physical Characteristics



MATERIAL

| | |
|-----------|-----------------|
| Diaphragm | Stainless Steel |
|-----------|-----------------|

TEMPERATURE RANGES

| | |
|-----------|-------------------------|
| Operating | -20 to +60 $^{\circ}$ C |
| Storage | -20 to +70 $^{\circ}$ C |

| | |
|--------|-----|
| Weight | 2 g |
|--------|-----|

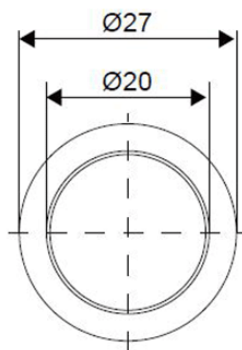

General tolerance = \pm 0.5 mm and all measurements in mm unless otherwise noted.

| Revision | Description | By | Date |
|----------|------------------------|----|------------|
| 0-2025 | Original Specification | KG | 2025-06-19 |

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.