

CS15-01W100-04-1X

Rev. 1-2026
 RoHS3 & REACH
 IPX7 Front Face
 Chamber-Free Mobile Speakers




Operating Characteristics: Baffle Board

ELECTRICAL

| | |
|----------------------|-----------------------------|
| Rated Power | 1 W |
| Short Term Max Power | 1.2 W |
| Impedance | 8 Ω ± 15 % 2,000 Hz; 1 W |

ACOUSTIC

| | |
|-------------|---|
| f_o | 1,000 Hz ± 20 % 1 W |
| Freq. Range | 800 to 20,000 Hz |
| Rated SPL | 96 ± 3 dB 2,000 Hz; AVG; 1 W; 10 cm |
| Distortion | <10 % 2,000 Hz; 1 W |

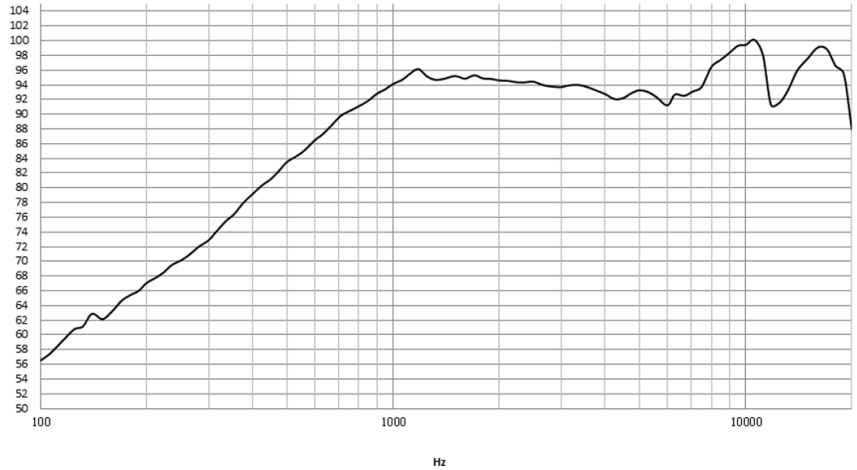

Physical Characteristics


MATERIALS

| | |
|-----------|-----------------------------------|
| Housing | Stainless Steel + PPA |
| Cone | PEEK |
| Magnet | NdFeB |
| Wire | UL1571, 30 AWG |
| Connector | Molex:51021-0200 Or Equivalent |

TEMPERATURE RANGES

| | |
|-----------|---------------|
| Operating | -20 to +70 °C |
| Storage | -40 to +85 °C |

Weight 1.5 g

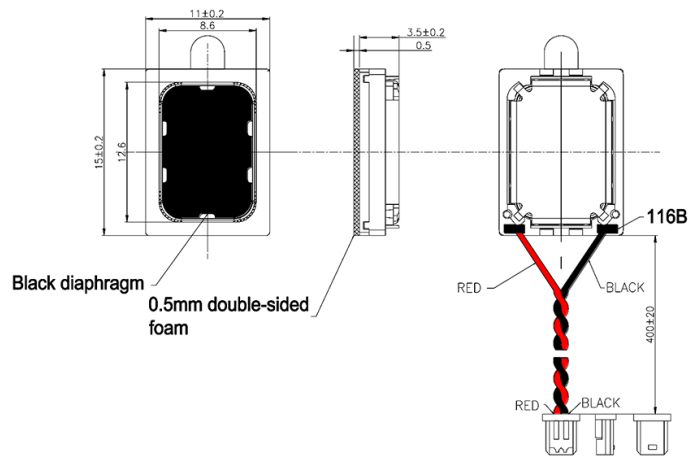

General tolerance = ±0.25 mm and all measurements in mm unless otherwise noted.

| Revision | Description | By | Date |
|----------|--|----|------------|
| 0-2025 | Original Specification | KG | 2025-02-25 |
| 1-2026 | Updated to include TS Parameters and XMAX value. | KG | 2026-03-06 |

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.

CS15-01W100-04-1X

Rev. 1-2026
 RoHS3 & REACH
 IPX7 Front Face
 Chamber-Free Mobile Speakers



Thiele Small Parameters

| Electrical Parameters | Value | Unit | Description |
|------------------------|--------|-----------------|--|
| <i>Re</i> | 6.93 | Ohm | electrical voice coil resistance at DC |
| <i>Le</i> | 0.027 | mH | frequency independent part of voice coil inductance |
| <i>L2</i> | 0.003 | mH | para-inductance of voice coil |
| <i>R2</i> | 0.25 | Ohm | electrical resistance due to eddy current losses |
| <i>Cmes</i> | 130.81 | μF | electrical capacitance representing moving mass |
| <i>Lces</i> | 0.15 | mH | electrical inductance representing driver compliance |
| <i>Res</i> | 1.89 | Ohm | resistance due to mechanical losses |
| <i>fs</i> | 1148.8 | Hz | driver resonance frequency |
| Mechanical Parameters | Value | Unit | Description |
| <i>Mms</i> | 0.05 | g | mechanical mass of driver diaphragm assembly including air load and voice coil |
| <i>Mmd (Sd)</i> | 0.049 | g | mechanical mass of voice coil and diaphragm without air load |
| <i>Rms</i> | 0.202 | kg/s | mechanical resistance of total-driver losses |
| <i>Cms</i> | 0.384 | mm/N | mechanical compliance of driver suspension |
| <i>Kms</i> | 2.6 | N/mm | mechanical stiffness of driver suspension |
| <i>Bl</i> | 0.618 | N/A | force factor (Bl product) |
| <i>Lambda s</i> | 0.291 | N/A | suspension creep factor |
| Loss factors | Value | Unit | Description |
| <i>Qtp</i> | 1.404 | N/A | total Q-factor considering all losses |
| <i>Qms</i> | 1.787 | N/A | mechanical Q-factor of driver in free air considering Rms only |
| <i>Qes</i> | 6.546 | N/A | electrical Q-factor of driver in free air considering Re only |
| <i>Qts</i> | 1.404 | N/A | total Q-factor considering Re and Rms only |
| Other Parameters | Value | Unit | Description |
| <i>Vas</i> | 0.0006 | l | equivalent air volume of suspension |
| <i>n0</i> | 0.014 | % | reference efficiency (2 pi-radiation using Re) |
| <i>Lm</i> | 73.62 | dB | characteristic sound pressure level (SPL at 1m for 1W @ Re) |
| <i>Lnom</i> | 74.24 | dB | nominal sensitivity (SPL at 1m for 1W @ Zn) |
| <i>rmse Z</i> | 1.18 | % | root-mean-square fitting error of driver impedance Z(f) |
| <i>rmse Hx</i> | 5.61 | % | root-mean-square fitting error of transfer function Hx (f) |
| <i>Series resistor</i> | 0 | Ohm | resistance of series resistor |
| <i>Sd</i> | 1.07 | cm ² | diaphragm area |
| <i>XMAX</i> | 0.2 | mm | maximum one-way linear excursion of a speaker cone before distortion increases |

| Revision | Description | By | Date |
|----------|--|----|------------|
| 0-2025 | Original Specification | KG | 2025-02-25 |
| 1-2026 | Updated to include TS Parameters and XMAX value. | KG | 2026-03-06 |

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.