

CS25-01W60-03-1

Former P/N: CS25W-0160-031

Rev. 1-2019
RoHS3 & REACH
Mobile Speakers




Operating Characteristics

ELECTRICAL

Rated Power	1.5 W
Short Term Max Power	2.0 W
Impedance	4 Ω ± 15 % 2,000 Hz; 0.25 W

ACOUSTIC: Baffle Board

f_0	600 Hz ± 20 % 0.25 w
Freq. Range	600 to 20000 Hz
Rated SPL	92 ± 3 dB 800, 1000, 1200, 1500 Hz; 1.5 W; 10 cm;
Distortion	<10 % 1000 Hz; 1.5 W

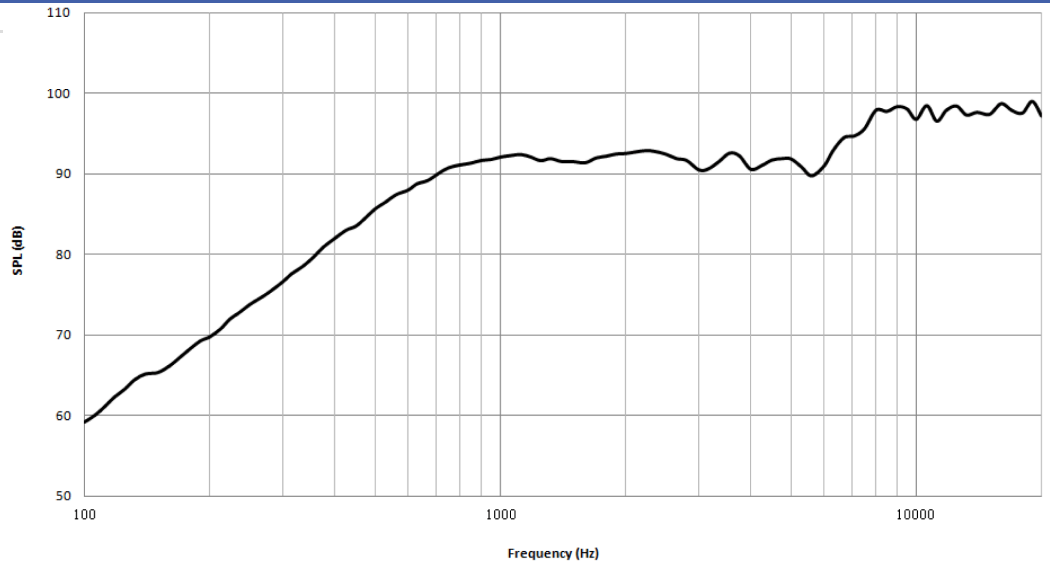

Physical Characteristics


MATERIALS

Housing	Black Plastic
Cone	PEEK
Magnet	NdFeB
Wire	UL 1571, 32 AWG

TEMPERATURE RANGES

Operating	-30 to +70 °C
Storage	-40 to +85 °C

Weight 2.7 g

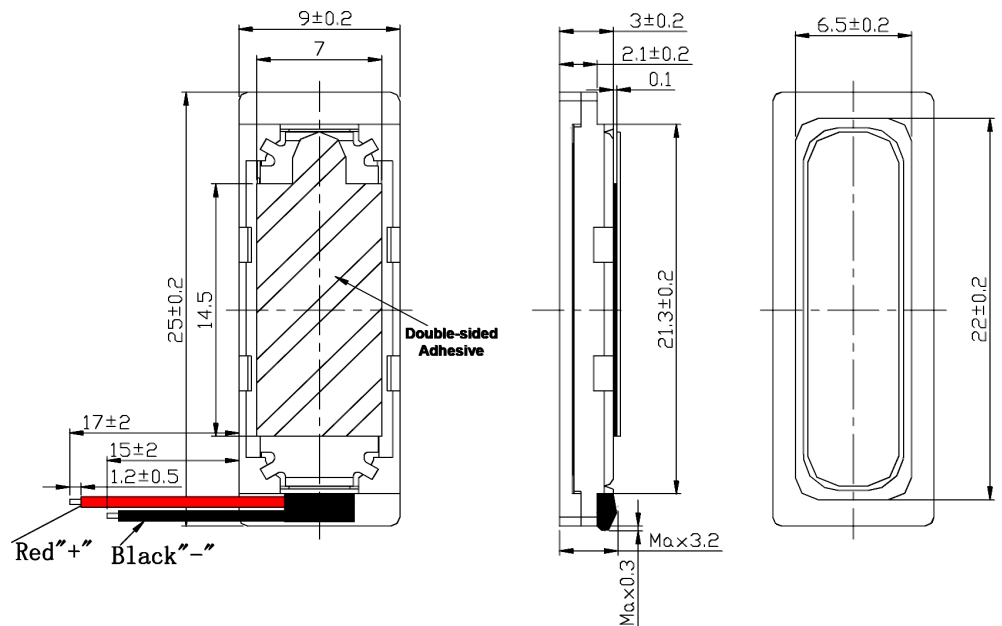

Revision	Description	By	Date
0-2019	Initial Specification Sheet	JL	2019-02-19
1-2019	Migrate to new format.	CF	2019-06-24

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.