

Tel: 1-800-722-8197 1-631-595-2217 Fax: 1-631-667-5484 EMAIL: sales@challelec.com WEB: www.challengeelectronics.com ISO 9001/14001:2015 Certified

## INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CS25-01W75-03-2

Former P/N: CES250V030BF08PMN750RGDJ

Rev. 3-2019 RoHS3 & REACH Mobile Speakers



## **Operating Characteristics ELECTRICAL** Rated Power 1.0 W Short Term Max Power 1.5 W 90 $8~\Omega$ $\pm$ 15 % Impedance 3000 Hz: 0.125 W 70 ACOUSTIC: 2CC Sealed Enclosure 750 Hz ± 20 % fo 10000 Frequency (Hz) 750 to 20000 Hz Freq. Range $93 \pm 3 \, dB$ Rated SPL 800, 1000, 1200, 1500 Hz; 1.0 W; 10 cm; Distortion 10 % 1000 Hz; 0.125 W

## Physical Characteristics


| ИАТЕ | RIALS Plastic |                 |  |  |  |
|------|---------------|-----------------|--|--|--|
|      | Housing       | Plastic         |  |  |  |
|      | Cone          | PEN + AL, Black |  |  |  |
|      | Magnet        | NdFeB           |  |  |  |
|      | Wire          | UL 1571, 32 AWG |  |  |  |
|      |               |                 |  |  |  |

TEMPERATURE RANGES

Operating -30 to +70 °C

Storage -40 to +85 °C

Weight 2.7 g

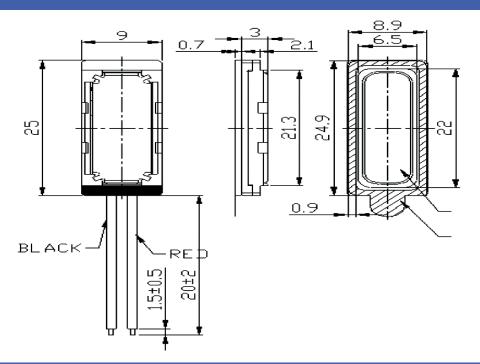

| Revision | Description  | Ву | Date       |
|----------|--|----|------------|
| 2-2017   | Corrected type-o in description only. Changed 250 mm to 25.0 mm. | WS | 2017-06-26 |
| 3-2019   | Migrate to new format  | WS | 2019-06-21 |

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.