

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CI36P-48E290-M-10X

Former P/N: CE-BCM948AQ5

 Rev. 5-2019
 RoHS3 & REACH & 300 HR ASTM B117 & IP65
 Piezoelectric Indicators

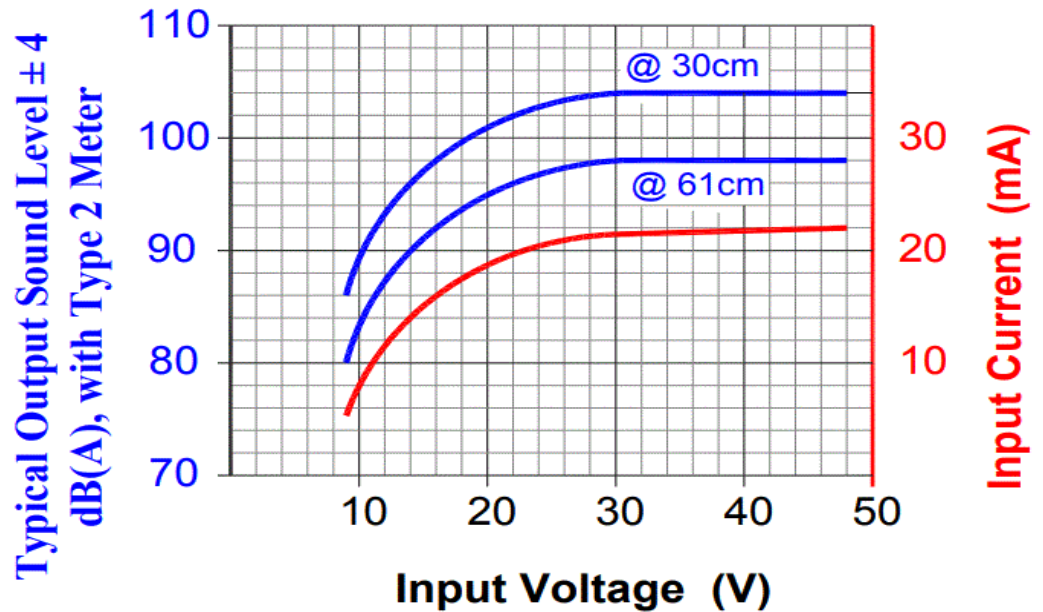

Operating Characteristics

ELECTRICAL

Rated Voltage	36 & 48 VDC
Operating Voltage	9 to 48 VDC
Max Current at Vmax	25 mA

ACOUSTIC

Tone Category	Pulsating
Description	Intermittent
Center <i>f</i>	2900 ± 250 Hz
Pulse <i>f</i>	1 Hz ± 10 %
Tone Category	Continuous
Description	Steady
Center <i>f</i>	2900 ± 250 Hz
Min SPL at Vmin	83 dB
Min SPL at Vmax	95 dB
Test Conditions	61 cm



Physical Characteristics

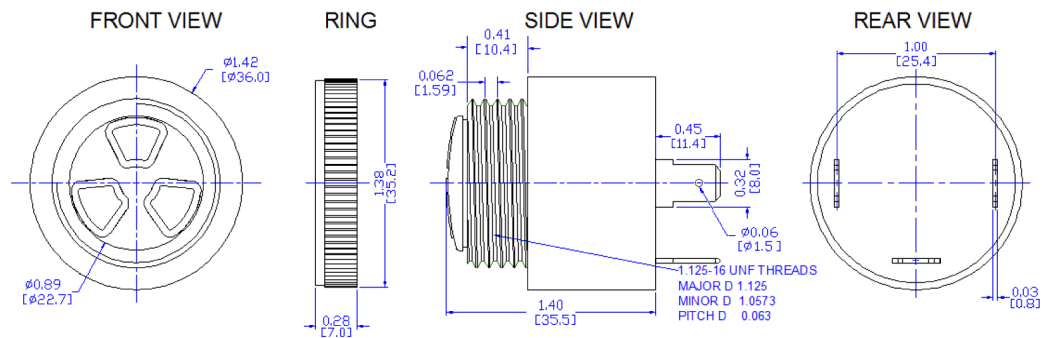
MATERIALS

Housing	Noryl PX9406
Diaphragm	Stainless Steel
Terminal	Brass

TEMPERATURE RANGES

Operating	-30 to +65 °C
Storage	-40 to +105 °C

Weight 40 g



Revision	Description	By	Date
4-2017	updated mech dwg.(changed terminal length from 10.9 to 11.4)	WS	2017-07-05
5-2019	Migrate to new format	YK	2019-06-21

Warranty: For a period of two (2) years from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.