

Tel: 1-800-722-8197 1-631-595-2217 Fax: 1-631-667-5484 EMAIL: sales@challelec.com WEB: www.challengeelectronics.com ISO 9001/14001:2015 Certified


## INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CS13-00P90-03-1X

Rev. 1-2024 RoHS3 & REACH IP67 Mobile Speakers



## Operating Characteristics: 3cc Sealed Enclosure




ELECTRICAL

 fo
 900 Hz ± 15 % 0.8 W; 10 cm

 Freq. Range
 600 to 20000 Hz

 Rated SPL
 88.5 ± 3 dB 2000 Hz; AVG; 0.8 W; 10 cm

 Distortion
 Max 10 % 1000 Hz; 0.8 W

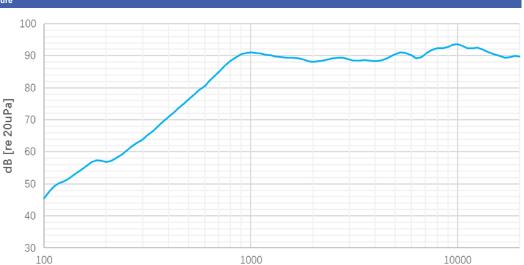


## **Physical Characteristics**

IATERIALS		
Housing	PPA	
Cone	Silica Gel	
Magnet	NdFeB	
Solder Pads	Tin Plated Copper	

TEMPERATURE RANGES

Operating	-20 to +60 °C	
Storage	-30 to +70 °C	

Weight 0.75 g

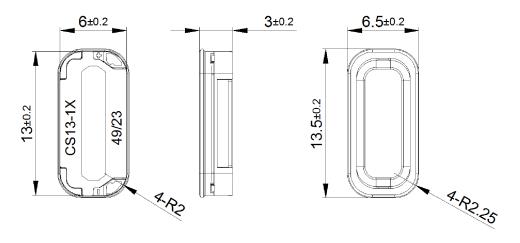

General tolerance = ±0.5 mm and all measurements in mm unless otherwise noted.

Revision	Description	Ву	Date
0-2023	Original Specification.	SK	2023-11-02
1-2024	Updated tolerances in the mechanical drawing.	AL	2024-03-20

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.